

# Solid State Broadband High Power Amplifier

**2198**
**20 - 6000 MHz 80/80/35 Watts**

The 2198 is a tri-band amplifier housed in a single chassis and is suitable for high bandwidth, high power CW, modulated, and pulse applications. This amplifier utilizes both High power LDMOS and GaN devices that provide wide frequency response, high gain, high peak power capability, and low distortions. Exceptional performance, long-term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, and all qualified components. The amplifier is constructed with a 3RU drawer, including the forced air-cooling. Available operating voltage configurations are single phase 100-240 VAC, up to 400Hz and 28 VDC.



SKU#: 2198-001

Each band overlaps and selection of the band is easy via the front panel touch screen or with a PC connected to the Ethernet port as a peer connection or networked. The amplifier includes a built-in control and monitoring system, with remote management and diagnostics via an embedded web server allowing network managed site status and control simply by connecting the unit's Ethernet port to a LAN. Using a web browser and the unit's IP address (IPV4) allows ease of access with the benefit of multi-level security. The control system core runs an embedded OS (Linux), has a built-in non-volatile memory for event recording, and factory setup recovery features. The extended memory option allows storage of control parameters and event logs.

Empower RF's ISO9001:2015 Quality Assurance Program assures consistent performance and the highest reliability.

- Solid-state Class AB compact modular design
- Suitable for CW, AM, FM and pulse (Consult factory for other modulation types)
- Embedded directional Coupler – Eliminates the needs for external component.
- 50 ohm input/output impedance
- Built-in Control, Monitoring and Protection functions
- High reliability and ruggedness

## ELECTRICAL SPECIFICATIONS 120V<sub>AC</sub>, @ 25°C, 50 Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	Band A	20		1000	MHz
	Band B	1000		3000	
	Band C	2000		6000	
Power Output CW (Notes 1, 3)	P <sub>SAT</sub>	80/80/35	100/100/40		Watt
Power Gain	G <sub>P</sub>	49/49/45			dB
Input Power for Rated P <sub>SAT</sub> , MGC Mode (Note 2)	P <sub>IN</sub>	-5	0	+1.0	dBm
Input Power Range, ALC Mode	P <sub>IN-RANGE</sub>	-5.0		+5.0	dBm
Small Signal Gain Flatness / Leveled ALC	ΔG			±3.5 / ±1.5	dB
Gain Adjustment Range	VVA	20			dB
Input Return Loss	S <sub>11</sub>			-10	dB
Noise Figure @ maximum gain	NF			15	dB
Third Order Intermodulation Distortion 2-Tone @ 44/44/40 dBm per Tone, 1MHz Spacing	IM3		-25		dBc
Harmonics @ Rated P <sub>OUT</sub>	2 <sup>ND</sup>		-20	-10	dBc
	3 <sup>RD</sup>		-20	-10	
Spurious Signals	Spur			-60	dBc
Operating Voltage	V <sub>AC</sub>	100	120	240	Volt
	V <sub>DC</sub>	24	28	32	
Power Consumption @ Rated P <sub>OUT</sub>	P <sub>D</sub>			700	Watt
Band Switching Time	T <sub>sw</sub>			60	mSec

**Notes:**

1. CW measurement performed in MGC Mode (Manual Gain Control)

2. Band C Input range -11 to 1dBm.

3. The front RF connectors option output power is less by up to 0.50dB (Band A), 1.00dB (Band B), 1.50dB (Band C) due to added insertion loss of RF cable routed to the front panel.

## MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Dimensions W x H x D	19.0 x 5.25 x 23.7	Inch
Weight	50	Pound
RF Connectors Input / Output	Type-N, Female	RF INPUT / RF OUTPUT
RF Sample Connectors	Type-SMA, Female	Forward / Reverse
Blanking/Gating Input Connector	Type-BNC, Female	Blanking
Cooling	Built-in forced-air cooling system – front to rear	Airflow Direction

# Solid State Broadband High Power Amplifier

**2198**
**20 - 6000 MHz 80/80/35 Watts**
**ENVIRONMENTAL CHARACTERISTICS**

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature	T <sub>A</sub>	-10		+50	°C
Non-operating Temperature	T <sub>STG</sub>	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Shock / Vibration - MIL-STD-810F Shock Method 516.5, Vibration Method 514.5	SH / VI				

**PROTECTIONS:**

Parameter	Specification	Unit
Input Overdrive	+10 dBm	Max
VSWR Protection	At 3:1 – PA backs-off output power to a safe operating level – no system shutdown, “On Air” time is maximized	-
Thermal – Graceful Degradation	Ambient 50°C	Min
Default Data Recovery	Factory Default Calibration Recovery	

**COMMUNICATION INTERFACES:**


Function	Utility	Connector
Ethernet	Network management of device / web interface	RJ45
USB	Mass storage / Expansion Bus	USB 1.x/2.0 compatible
RS232, default (RS422, factory configurable)	Serial management of device / local operator access	D-Sub 9-position Male

**SYSTEM I/O INTERFACE – 14-Position**

Pin #	Description	Specification
1	N/C	No Connection (reserved)
2	N/C	No Connection (reserved)
3	Summary Fault	Summary Fault: Active TTL Logic Low ( $\leq 0.7V$ ), ( <i>Internally Pulled-High</i> )
4	Reserved	No Connection
5	Shutdown	Amplifier Disable: TTL Logic Low ( $\leq 0.7V$ ), ( <i>Internally Pulled-High</i> )
6	AUX P/S Test Point	+12.0V <sub>DC</sub> $\pm 2.0V$ (resettable 0.5amp fuse)
7	Main P/S Test Point	+44.0V <sub>DC</sub> $\pm 4.8V$ (resettable 0.5amp fuse)
8	GND	Ground
9-11	Open drain control	Site management utility (reserved)
12&13	Digital I/O (configurable)	Site management utility (reserved)
14	GND	Ground

**AVAILABLE OPTIONS**

2198-XXX
-001 100-240VAC, 1-ph, 47-63 Hz, Rear RF Connectors
-002 28 VDC, Rear RF Connectors
-003 100-240VAC, 1-ph, 47-63 Hz, Front RF Connectors <i>Note 3</i>
-004 28 VDC, Front RF Connectors <i>Note 3</i>
Contact us for other available options
<b>Standard Feature:</b>
-LCD Control, Ethernet & Serial Comm
-Main RF Connectors: <b>Input &amp; Output</b> [Type-N, F]
-Sample Port: SMA-F [Forward & Reverse]
-Blanking/Gating Port: BNC-F
-Rack Slides, Handles and Rackmount Brackets

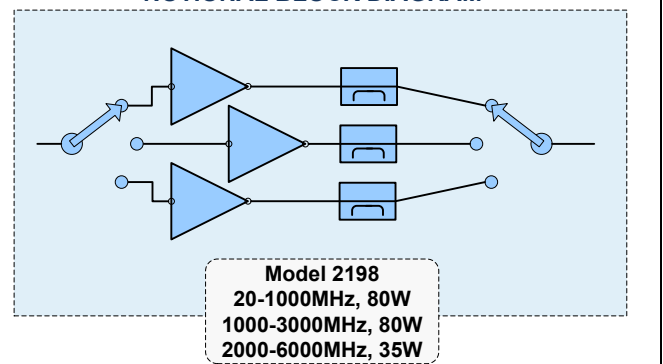
**NOTIONAL BLOCK DIAGRAM**


# Solid State Broadband High Power Amplifier


2198

20 - 6000 MHz 80/80/35 Watts

MECHANICAL OUTLINE – (shown with Rear RF Connectors)

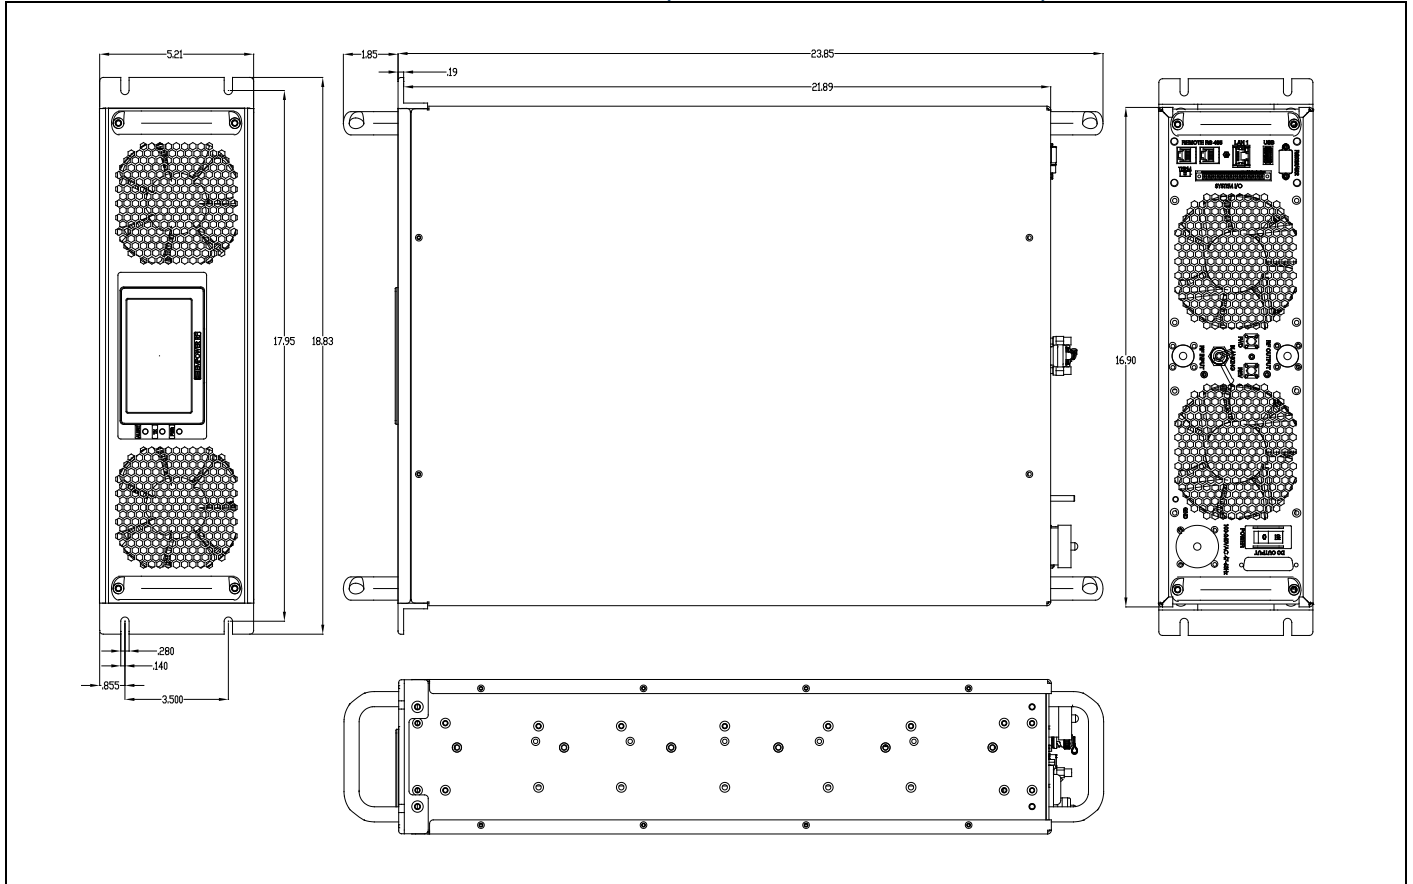

Front and Rear Views

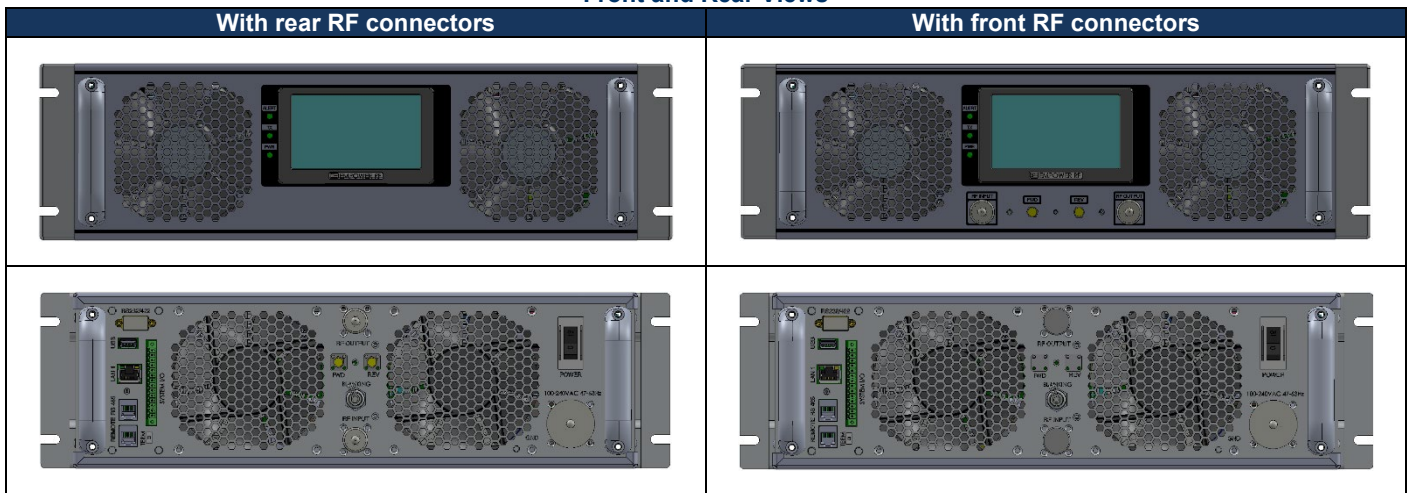

# Solid State Broadband High Power Amplifier


2198

20 - 6000 MHz 80/80/35 Watts


**TYPICAL PERFORMANCE**

**TYPICAL PERFORMANCE – Band A (20-1000 MHz)**


**Plot 1 – Small Signal Gain**  
 Top Curve: Small Signal Gain @  $P_{IN} = -20\text{dBm}$   
 Reference: 50dB, 2dB/div.  
 Bottom Curve: Input Return Loss  
 Reference: 0dB, 10dB/div.

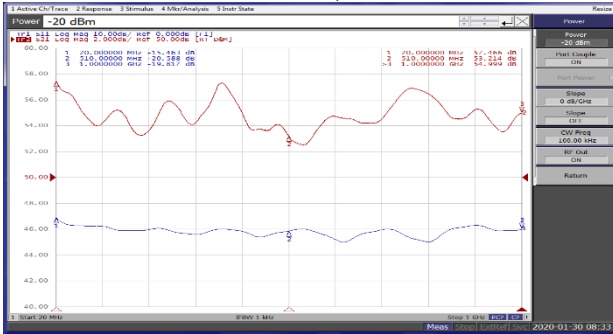

**Plot 2 – Leveled ALC Flatness – 80W**  
 Top Curve: ALC Response @ Constant  $P_{IN} = 0\text{dBm}$   
 Reference: 50dB, 1dB/div.  
 Bottom Curve: Input Return Loss  
 Reference: 0dB, 10dB/div.

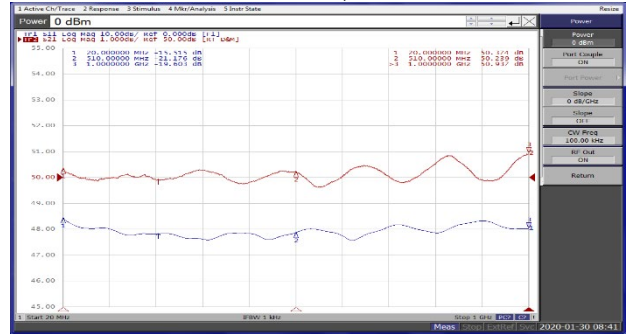

**Plot 3 – Gain Adjustment Range @  $P_{IN} = -20\text{dBm}$**   
 Top Curve: Maximum Gain  
 Middle Curve: Minimum Gain  
 Reference: 30dB, 10dB/div.  
 Bottom Curve: Input Return Loss @ Minimum Gain  
 Reference: 0dB, 10dB/div.

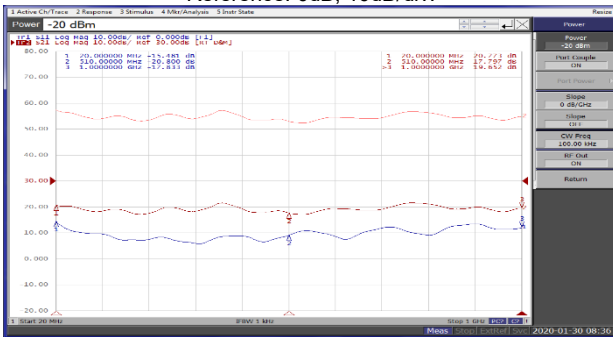


# Solid State Broadband High Power Amplifier

2198


20 - 6000 MHz 80/80/35 Watts

## TYPICAL PERFORMANCE – Band B (1000-3000 MHz)


**Plot 4 – Small Signal Gain**  
 Top Curve: Small Signal Gain @  $P_{IN} = -20\text{dBm}$   
 Reference: 58dB, 2dB/div.  
 Bottom Curve: Input Return Loss  
 Reference: 0dB, 10dB/div.

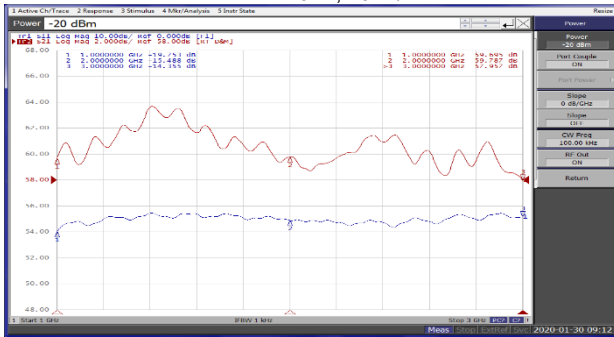

**Plot 5 – Leveled ALC Flatness – 80W**  
 Top Curve: ALC Response @ Constant  $P_{IN} = 0\text{dBm}$   
 Reference: 50dB, 1dB/div.  
 Bottom Curve: Input Return Loss  
 Reference: 0dB, 10dB/div.

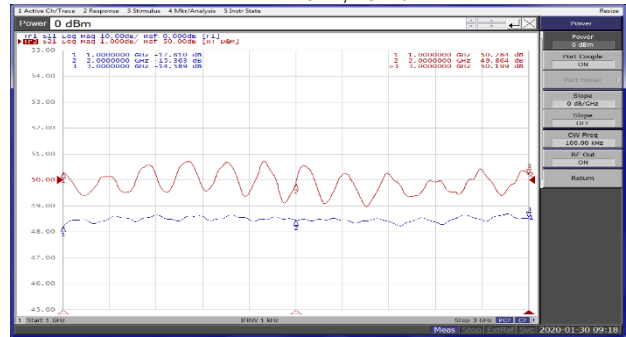

**Plot 6 – Gain Adjustment Range @  $P_{IN} = -20\text{dBm}$**   
 Top Curve: Maximum Gain  
 Middle Curve: Minimum Gain  
 Reference: 30dB, 10dB/div.  
 Bottom Curve: Input Return Loss @ Minimum Gain  
 Reference: 0dB, 10dB/div.

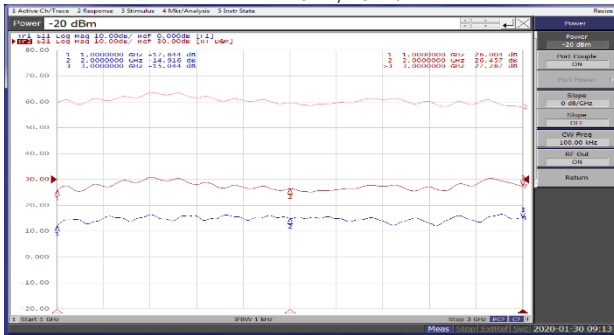


# Solid State Broadband High Power Amplifier

2198


20 - 6000 MHz 80/80/35 Watts

## TYPICAL PERFORMANCE – Band C (2000-6000 MHz)

**Plot 7 – Small Signal Gain**  
 Top Curve: Small Signal Gain @  $P_{IN} = -20\text{dBm}$   
 Reference: 54dB, 2dB/div.  
 Bottom Curve: Input Return Loss  
 Reference: 0dB, 10dB/div.

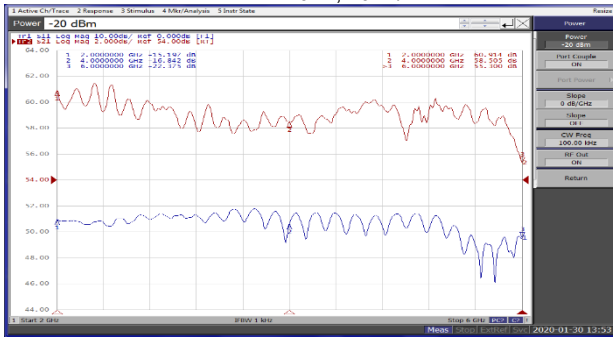

**Plot 8 – Leveled ALC Flatness – 35W**  
 Top Curve: ALC Response @ Constant  $P_{IN} = 0\text{dBm}$   
 Reference: 46dB, 1dB/div.  
 Bottom Curve: Input Return Loss  
 Reference: 0dB, 10dB/div.

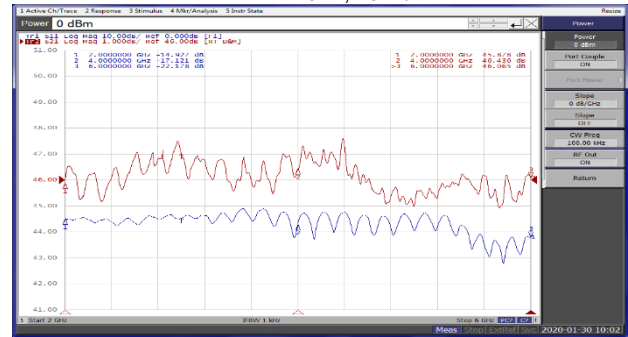

**Plot 9 – Gain Adjustment Range @  $P_{IN} = -20\text{dBm}$**   
 Top Curve: Maximum Gain  
 Middle Curve: Minimum Gain  
 Reference: 30dB, 10dB/div.  
 Bottom Curve: Input Return Loss @ Minimum Gain  
 Reference: 0dB, 10dB/div.

