

Solid State Broadband High Power Amplifier

2010 - BBS5A7AHM

2000 – 4000 MHz / 50 Watts

The BBS5A7AHM (SKU 2010) is suitable for S-Band broadband and band specific high power linear applications. This amplifier utilizes high power GaAsFET devices that provide high gain, wide dynamic range, low distortions and excellent linearity. Exceptional performance and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, built in high quality power supply, EMI/RFI filters, machined housings and all qualified components. Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.



Shown with option package 10

- Solid-state linear design
- Instantaneous ultra broadband
- Small and lightweight
- Standard front panel manual gain adjust
- Suitable for CW, AM, and FM (Consult factory for other modulation types)
- 50 ohm input/output impedance
- High reliability and ruggedness

ELECTRICAL SPECIFICATIONS @ 120V_{AC}, 25°C, 50 Ω system

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	2000		4000	MHz
Output Power CW	P _{SAT}	50	60		Watt
Output Power @ 1dB Gain Compression	P _{1dB}	40			Watt
Power Gain @ 1dB Gain Compression	G _{1dB}	46			dB
Input Power for Rated P _{SAT}	P _{IN}		0		dBm
Small Signal Gain Flatness	ΔG			±1.5	dB
Gain Adjustment Range	FGA	25			dB
Input Return Loss	S ₁₁			-10	dB
Noise Figure	NF			10	dB
Third Order Intercept Point 2-Tone @ 37dBm/Tone, 100kHz Spacing	IP3		+56		dBm
Harmonics @ P _{OUT} = 40W	H		-20		dBc
Spurious Signals	Spur		-70	-60	dBc
Operating Voltage (single phase)	V _{AC}	100		240	Volt
Power Consumption @ P _{OUT} = 50W CW	P _D		400	500	Watt

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimension	19 x 5.25 x 22	Inch	-
Weight	47	lb.	-
RF Connectors Input / Output	Type-N, Female	-	-
Cooling	Built-in forced air cooling system	-	-

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Temperature	T _C	0		+50	°C
Non-operating Temperature	T _{STG}	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude (MIL-STD-810F Method 500.4)	ALT			30,000	Feet
Vibration / Shock MIL-STD-810F - Method 514.5/516.5 – Proc I	VI / SH		Airborne		

LIMITS

Input RF drive level without damage	+10 dBm	Max
Load VSWR @ P _{OUT} = 40W	∞ @ all load phase & amplitude for duration of 1 minute 3:1 @ all load phase & amplitude continuous	-
Thermal Overload	85°C shutdown	Max

Solid State Broadband High Power Amplifier

2010 - BBS5A7AHM

2000 – 4000 MHz / 50 Watts

AVAILABLE OPTIONS (for complete option list refer to www.empowerrf.com)


Option	Number	Description	Price
FGA	061	Front panel 10 turns manual gain adjustment.	Standard
LCD	062	Touchscreen Digital Display, including Fwd/Rev Power indication (dBm or Watt scale), Gain Adjustment, ALC Fast/Slow, On/Off, Standby mode, Fault indication, Rear panel GPIB / IEEE-488.2 and half duplex RS-232 or Full Duplex RS-422 remote interface. Note: Output Power is lowered by 0.5 - 0.75 dB with this option.	Call
FCN	051	Front Panel Type-N female	N/C
RCN	052	Rear Panel Type-N female	N/C

Available Options Packages: 07, 08, 09, 10

I/O INTERFACE CONNECTOR – D-Sub 9-Pin, Female

Pin #	Description	Specifications	Options	
			FGA	LCD
1	Forward Test Point	Analog Voltage 0-5V _{DC} relative to Forward Power Level		√
2	Reverse Test Point	Analog Voltage 0-5V _{DC} relative to Reverse Power Level		√
3	5V Test Point	Output +5.0V _{DC} ±0.2V	√	√
4	VVA Test Point	VVA Gain Control +5.6V _{DC} ±0.2V	√	
5	EXT Shutdown	Amplifier Disable: TTL Logic High (5V) (Internally Pulled-Low)	√	√
6	12V Test Point	Output +12.0V _{DC} ± 0.5V	√	√
7	P/S Test Point	Power Supply Output voltage: +12.0-15.0V _{DC}	√	√
8	GND	Ground	√	√
9	GND	Ground	√	√

SYSTEM OUTLINE SHOWN WITH OPTION PACKAGE 10

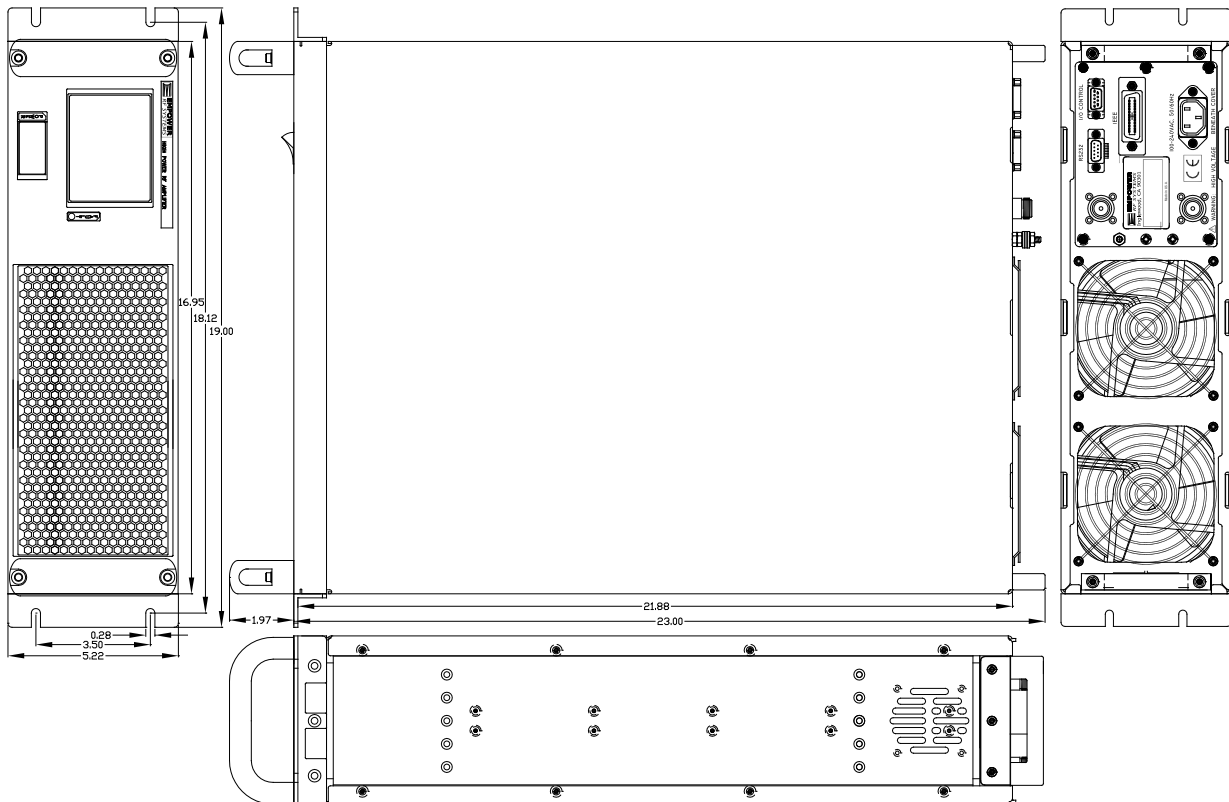

Solid State Broadband High Power Amplifier


2010 - BBS5A7AHM

2000 – 4000 MHz / 50 Watts

TYPICAL PERFORMANCE PLOTS


Plot 1 – Small Signal Gain and P_{1dB}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{1dB} , $P_{IN} = 0dBm$
 Reference: 47dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.

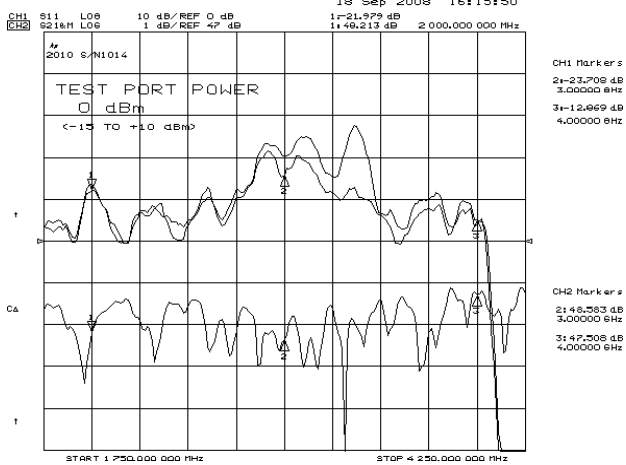


Plot 2 – Small Signal Gain and P_{SAT}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{SAT} , $P_{IN} = 2dBm$
 Reference: 46dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.

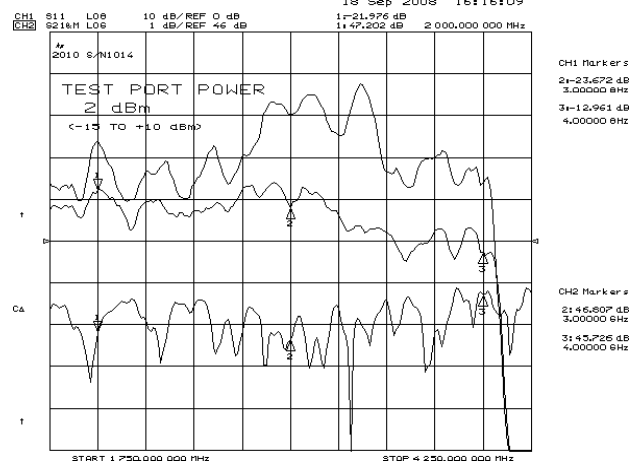

Plot 3 – Gain Adjustment Range

Top Curve: Maximum Gain @ $P_{IN} = -20dBm$
 Middle Curve: Minimum Gain @ $P_{IN} = -20dBm$
 Reference: 25dB, 10dB/div.
 Bottom Curve: Input Return Loss @ Minimum Gain
 Reference: 0dB, 10dB/div.

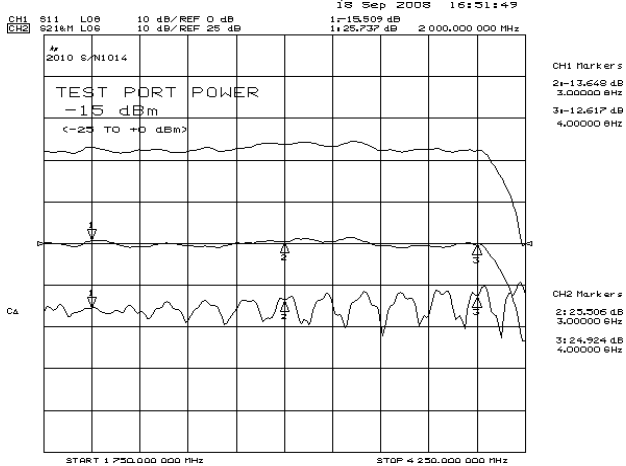

Plot 4 – ALC Flatness @ 25W & 5W

Top Curve: ALC @ 25W, $P_{IN} = 0dBm$
 Bottom Curve: ALC @ 5W, $P_{IN} = 0dBm$
 Reference: 41dB, 1dB/div.
 Middle Curve: Input Return Loss
 Reference: 0dB, 10dB/div.

