

Solid State Broadband High Power Amplifier

2197
2000 - 6000 MHz / 80 Watts

The 2197 is suitable for high bandwidth, high power CW, modulated, and pulse applications. This amplifier utilizes high power GaN on SiC devices that provide wide frequency response, high gain, high peak power capability, and low distortions. Exceptional performance, long-term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, and all qualified components. The amplifier is constructed with a 3RU drawer, including the forced air-cooling. Available operating voltage configurations are single phase 100-240 VAC up to 400Hz and 28 VDC.



SKU: 2197-005

The amplifier includes a built-in control and monitoring system, with protection functions which preserve high availability. Remote management and diagnostics are via Ethernet port to a LAN. It is performed remotely by a web browser or M²M (Machine-to-machine interface) or locally on the built-in control panel. The control system runs an embedded OS (Linux), has a built-in non-volatile memory for factory setup.

Empower RF's ISO9001:2015 Quality Assurance Program assures consistent performance and the highest reliability.

- Solid-state Class AB compact modular design
- Suitable for CW, AM, FM and pulse (Consult factory for other modulation types)
- Embedded directional coupler – Eliminates the need for external component
- 50 ohm input/output impedance
- Built-in Control, Monitoring and Protection functions
- High reliability and ruggedness

ELECTRICAL SPECIFICATIONS over temperature conditions (-10 to +50°C)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	2000		6000	MHz
Power Output CW <i>(Notes 1, 2)</i>	P _{SAT}	80			Watt
Power Gain @ 1dB Gain Compression	G _{1dB}	49			dB
Input Power for Rated P _{SAT}	P _{IN}		0		dBm
Input Power Range	P _{IN}	-3.0		+3.0	dBm
Small Signal Gain Flatness / Leveled ALC	ΔG			±3.5/±1.5	dB
Gain Adjustment Range	VVA	20			dB
Input Return Loss	S ₁₁			-10	dB
Noise Figure @ maximum gain	NF			15	dB
Third Order Intermodulation Distortion 2-Tone @ 40dBm/Tone, 1MHz Spacing	IM3		-28		dBc
Harmonics @ P _{OUT} = 80W	2 ND			-15	dBc
	3 RD			-20	dBc
Spurious Signals	Spur			-60	dBc
Operating Voltage	V _{AC}	100		240	Volt
	V _{DC}	24	28	32	
Power Consumption @ 80W CW	P _D			1000	Watt

Notes: 1. CW measurement performed in MGC Mode (Manual Gain Control)
 2. The front RF connectors option output power is less by up to 1.50 dB due to added insertion loss of the RF cable routed to the front panel.

MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Dimensions W x H x D (excludes connectors, handles and brackets)	17 x 5.25 x 22	Inch
Weight	65	Pound
RF Connectors Input / Output	N-type, Female	RF INPUT / RF OUTPUT
RF Sample Connectors	SMA, Female	FWD/REV
Blanking/Gating Input Connector	BNC, Female	Blanking
Cooling	Built in forced-air cooling system – front to rear	Airflow direction

Solid State Broadband High Power Amplifier

2197
2000 - 6000 MHz / 80 Watts
ENVIRONMENTAL CHARACTERISTICS:

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature	T _A	-10		+50	°C
Non-operating Temperature	T _{STG}	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Shock / Vibration - MIL-STD-810F Shock Method 516.5, Vibration Method 514.5	SH / VI				-

PROTECTIONS:

Parameter	Specification	Unit
Input Overdrive	+10 dBm	Max
VSWR protection	At 3:1 – PA backs-off output power to a safe operating level – no system shutdown, “On Air” time is maximized	-
Thermal – Graceful Degradation	Ambient 50°C	Min
Default Data Recovery	Factory Default Calibration Recovery	-

COMMUNICATION INTERFACES:

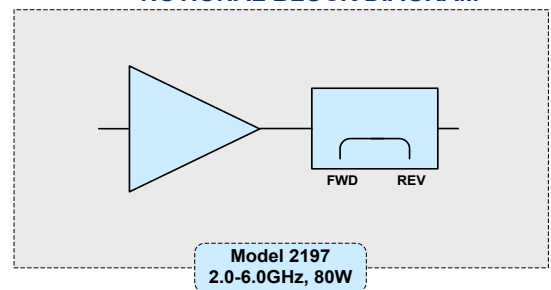
Function	Utility	Connector
Ethernet	Network management of device / web interface	RJ45
USB	Mass storage / Expansion Bus	USB 1.x/2.0 compatible
RS-232-default (RS422 – optional)	Serial management of device / local operator access	D-Sub 9-position Male

SYSTEM I/O CONNECTOR – 14-Position

Pin #	Description	Specification
1	N/C	No Connection (reserved)
2	N/C	No Connection (reserved)
3	Summary Fault	Summary Fault: Active TTL Logic Low ($\leq 0.7V$), (<i>Internally Pulled-High</i>)
4	Reserved	No Connection
5	Shutdown	Amplifier Disable: TTL Logic Low ($\leq 0.7V$), (<i>Internally Pulled-High</i>)
6	Aux P/S TP	+12.0V _{DC} $\pm 2.0V$ (resettable 0.5amp fuse)
7	Main P/S TP	+48.0V _{DC} $\pm 4.8V$ (resettable 0.5amp fuse)
8	GND	Ground
9-11	Open drain control	Site management utility (reserved)
12&13	Digital I/O (configurable)	Site management utility (reserved)
14	GND	Ground

Available Options

2197-XXX
-002 28 VDC, Rear RF Connectors
-003 100-240VAC, 1-PH, 47-63 Hz, Front RF Connectors <i>Note 2</i>
-004 28 VDC, Front Connectors <i>Note 2</i>
-005 100-240VAC, 1-PH, 47-63 Hz, Rear RF Connectors
Contact us for other available options
Standard Features:
-LCD Control, Ethernet & Serial Comm
-Main RF Connector: Input & Output [N-type, F]
-Sample Port: SMA-F [Forward & Reverse]
-Blanking/Gating Port: BNC-F
-Rack Slides, Handles and Rackmount Brackets

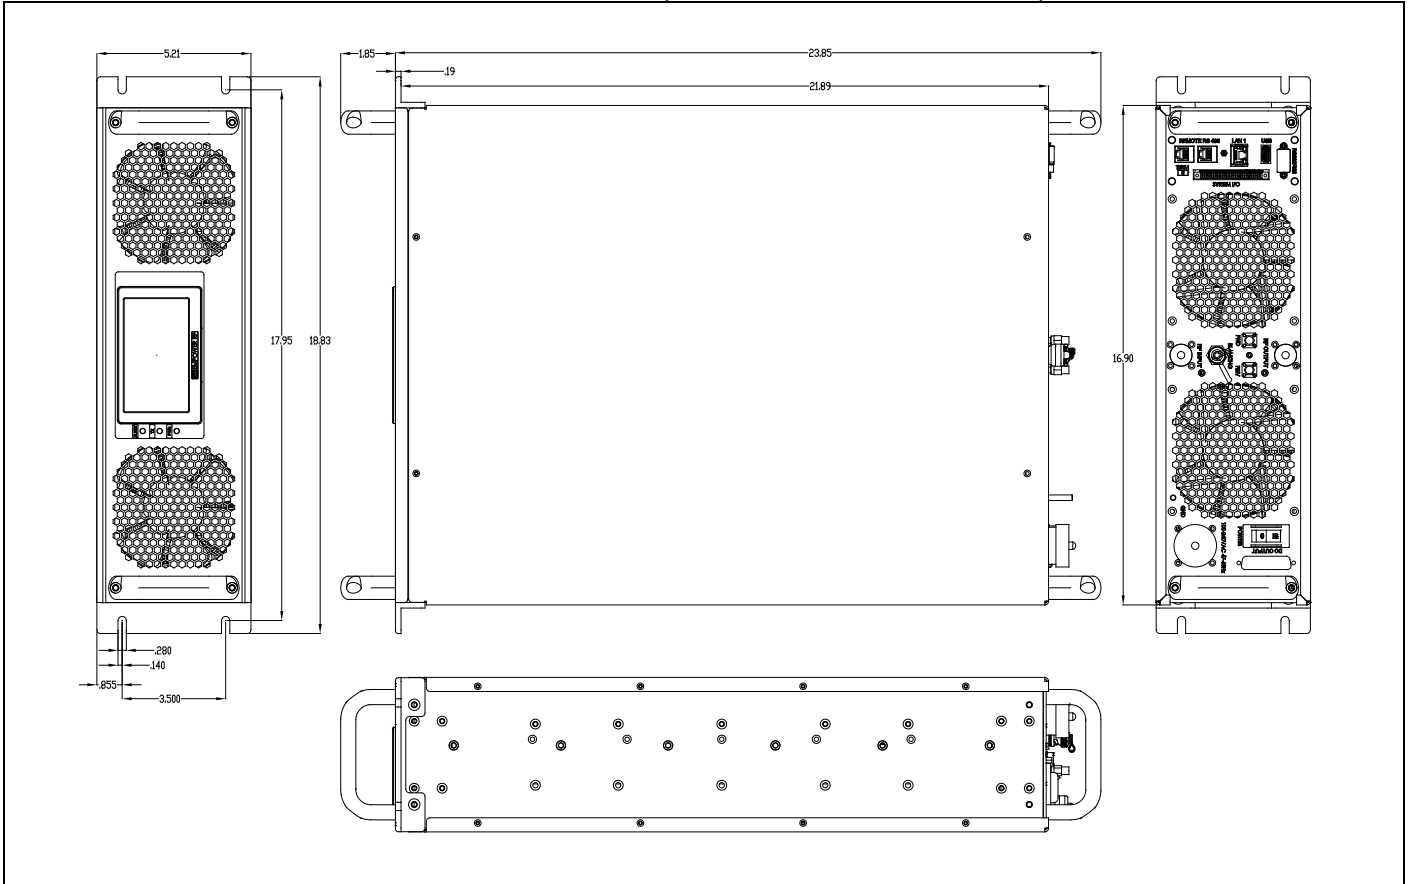
NOTIONAL BLOCK DIAGRAM


Solid State Broadband High Power Amplifier

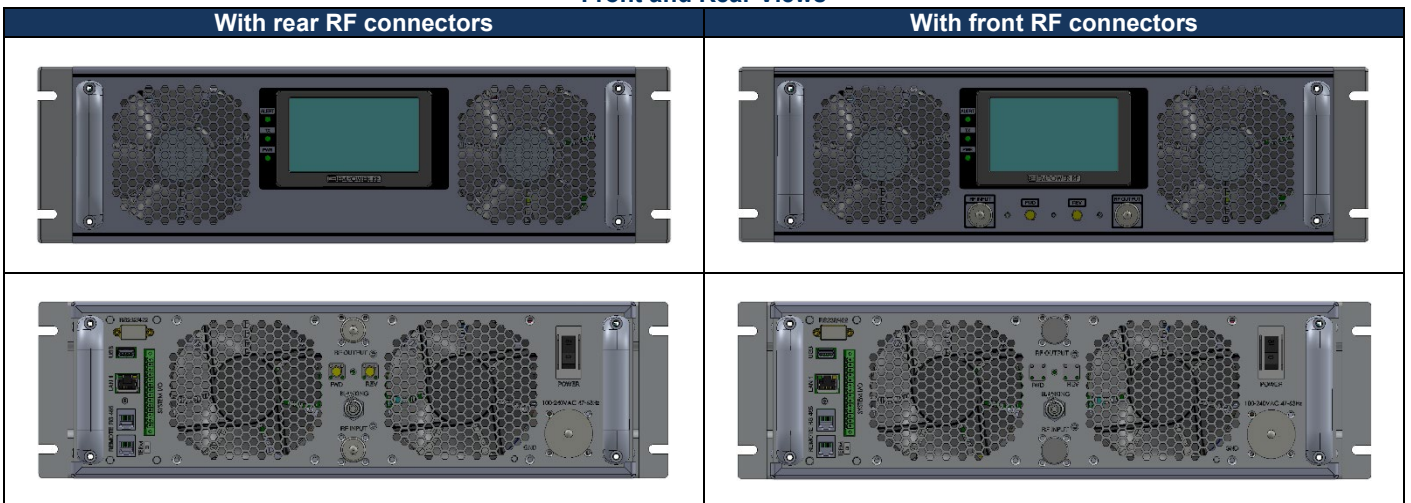
2197

2000 - 6000 MHz / 80 Watts

MECHANICAL OUTLINE – (shown with Rear RF Connectors)



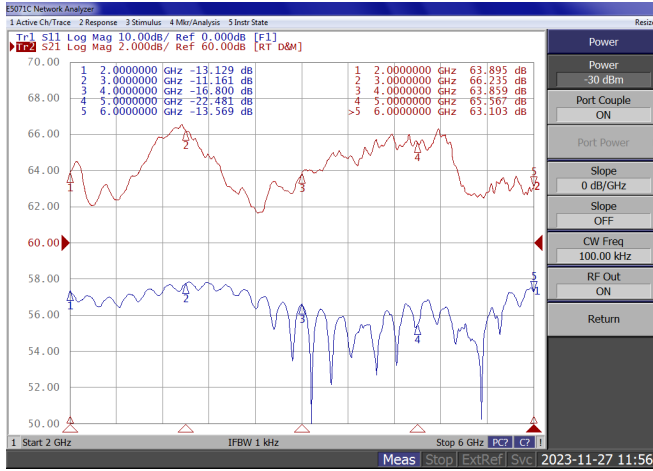
Front and Rear Views



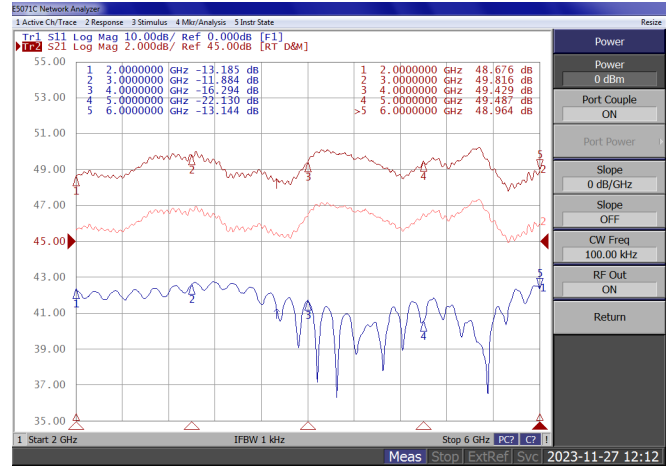
Solid State Broadband High Power Amplifier

2197
2000 - 6000 MHz / 80 Watts
TYPICAL PERFORMANCE PLOTS
Plot 1 – Small Signal Gain

Top Curve: Small Signal Gain @ $P_{IN} = -30\text{dBm}$
 Reference: 60dB, 2dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB 10dB/div.


Plot 2 – Leveled ALC Flatness @ $P_{IN} = 0\text{dBm}$

Top Curve: ALC Flatness @ 49dBm
 Middle Curve: ALC Flatness @ 46dBm
 Reference: 45dB, 2dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB 10dB/div.


Plot 2 – Gain Adjustment Range @ $P_{IN} = -30\text{dBm}$

Top Curve: Maximum Gain
 Middle Curve: Minimum Gain
 Reference: 40dB, 10dB/div.
 Bottom Curve: Input Return Loss @ Minimum Gain
 Reference: 0dB 10dB/div.

