

Solid State Broadband High Power Amplifier

1066 - BBM1C3CHM
1 – 100 MHz / 50 Watts

The BBM1C3CHM (SKU 1066) is suitable for high power broadband RF, VHF and band specific linear applications. This amplifier utilizes Silicon push-pull MOSFET power devices that provide high gain, wide dynamic range, low distortions, and good linearity. Exceptional performance, long term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, machined housings and qualified components. Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.



- Solid-state Class AB design
- Instantaneous ultra broadband
- Small and lightweight
- Built-in functions and protection circuits
- Suitable for CW, AM, and FM (Consult factory for other modulation types)
- 50 ohm input/output impedance
- High reliability and ruggedness

ELECTRICAL SPECIFICATIONS @ +28V_{DC}, 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	1		100	MHz
Output Power CW	P _{SAT}	50			Watt
Output Power @ 1dB Gain Compression	P _{1dB}	30			Watt
Power Gain @ 1dB Gain Compression	G _{1dB}	46			dB
Input Power for Rated P _{SAT}	P _{IN}		0	3	dBm
Small Signal Gain Flatness	ΔG		±1.0	±1.5	dB
Input Return Loss	S ₁₁			-10	dB
Noise Figure @ Max. Gain	NF		7	10	dB
Third Order Intercept Point	IP3		+54		dBm
2-Tone @ 33dBm/Tone, 100kHz Spacing					
Harmonics @ P _{OUT} = 30W	H		-20		dBc
Spurious Signals	Spur		-70	-60	dBc
Operating Voltage	V _{DC}	24	28	32	Volt
Current Consumption @ P _{OUT} = 50W CW	I _{DD}			7	Amp

MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Dimension	6.4 x 3.4 x 1.0	Inch
Weight	1.0	Pound
RF Connectors Input / Output	Type-SMA, Female	
DC Interface Connector	D-Sub 9-Pin, Male	
Cooling	External Heatsink (Not Supplied)	

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	T _C	0		+50	°C
Non-operating Temperature	T _{STG}	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude (MIL-STD-810F Method 500.4)	ALT			30,000	Feet
Vibration/Shock	VI/SH		Airborne		
MIL-STD-810F – Method 514.5/516.5 – Proc I					

Solid State Broadband High Power Amplifier

1066 - BBM1C3CHM

1 – 100 MHz / 50 Watts


LIMITS

Input RF drive level without damage	+10 dBm	Max
Load VSWR @ $P_{OUT} = 30W$	∞ @ all load phase and amplitude for duration of 1 minute 3:1 @ all load phase & amplitude continuous	-
Thermal Overload	85°C shutdown	Max

DC INTERFACE CONNECTOR – D-Sub 9-Pin, Male

Pin #	Description	Specification
1	Over Temp	Over Temp Alarm: TTL Logic Low (0V) (Normally Open)
2	N/C	No Connection
3	Temp Sensor	Analog voltage relative to Module's Temperature @ 10mV/°C
4	VVA	Control voltage range, 0-5V _{DC} Maximum Gain = 0V _{DC} , Minimum Gain = 5V _{DC}
5	Shutdown	Amplifier Disable: TTL Logic High (5V) (Internally Pulled-Low)
6&7	VDD	+26.0-30.0V _{DC}
8&9	GND	Ground

OUTLINE DRAWING

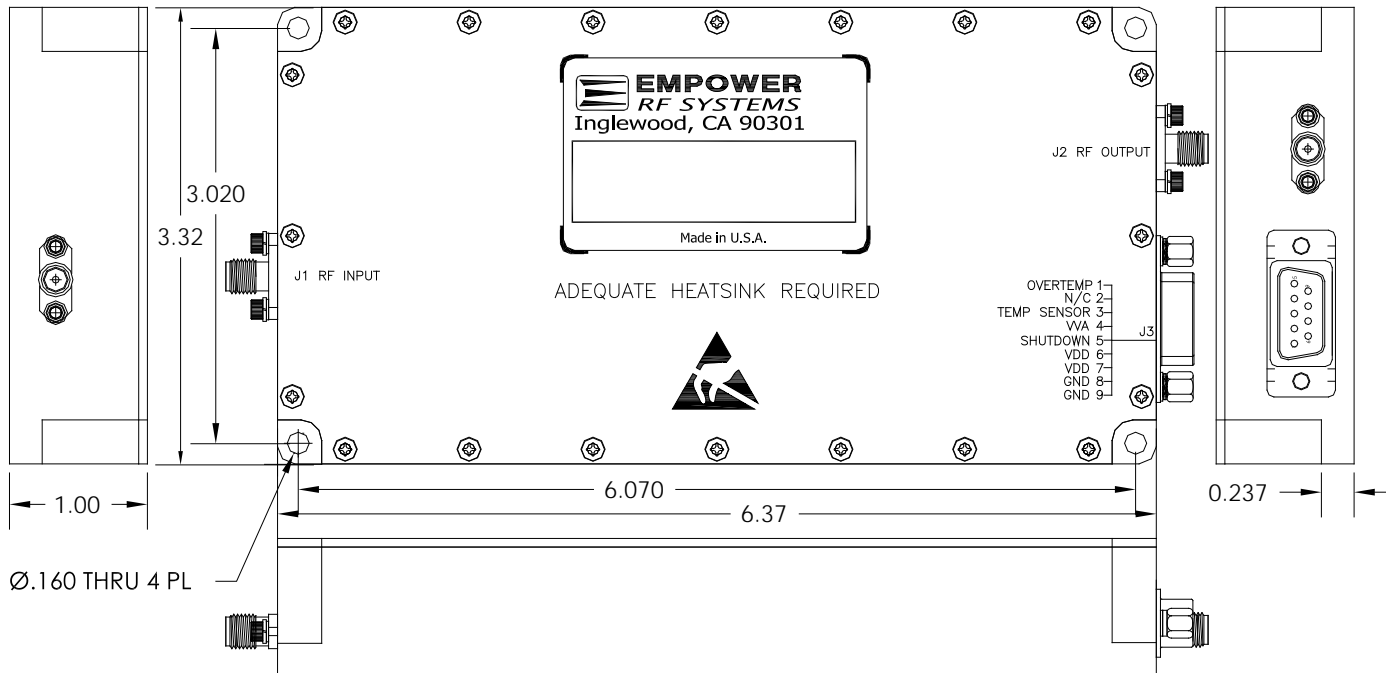

Solid State Broadband High Power Amplifier

1066 - BBM1C3CHM


1 – 100 MHz / 50 Watts

TYPICAL PERFORMANCE PLOTS

Plot 1 – Small Signal Gain and P_{1dB}
 Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{1dB} , $P_{IN} = -2.0dBm$
 Reference: 46dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.



Plot 2 – Small Signal Gain and P_{SAT}
 Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{SAT} , $P_{IN} = +1.0dBm$
 Reference: 46dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.

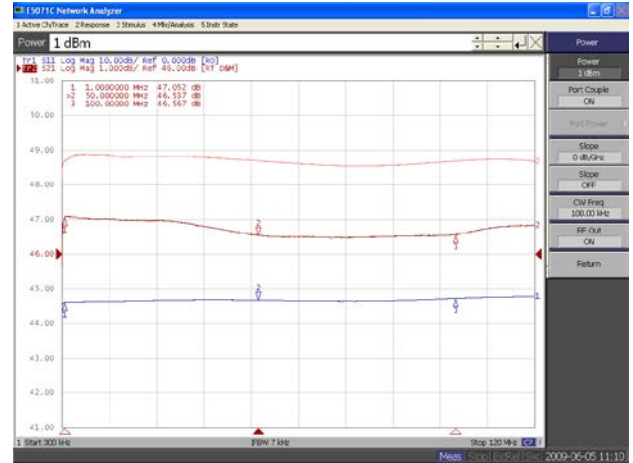

Plot 3 – Gain Adjustment Range, $P_{IN} = -20dBm$
 Top Curve: Maximum Gain, $VVA_{CTRL} = 0V$
 Middle Curve: Minimum Gain, $VVA_{CTRL} = 5V$
 Reference: 20dB, 10dB/div.
 Bottom Curve: Input Return Loss @ Minimum Gain
 Reference: 0dB, 10dB/div.

