

Solid State Broadband High Power Amplifier

2101 - BBS2E3KRR
20 – 500 MHz / 500 Watts

The BBS2E3KRR (2101) is suitable for broadband RF, VHF & UHF high power applications. This rack mount amplifier is utilizing advanced Push-Pull DMOS and LDMOS devices technology combination that provides high gain, wide dynamic range, low distortions and good linearity. Exceptional performance, long term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, built in high quality power supply, EMI/RFI filters, machined housings and all qualified components. Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.



SKU#: 2101FLRBXXXX

- Solid-state Class AB design
- Instantaneous ultra broadband
- Small form factor and lightweight
- Standard front panel manual gain adjust
- Suitable for CW, AM and FM (Consult factory for other modulation types)
- 50 ohm input/output impedance
- High reliability and ruggedness

ELECTRICAL SPECIFICATIONS @ 220V_{AC}, 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	20		500	MHz
Output Power CW	P _{SAT}	550	600		Watt
Output Power @ 1dB Gain Compression	P _{1dB}	500			Watt
Power Gain @ 1dB Gain Compression	G _{1dB}	56			dB
Input Power for Rated P _{SAT}	P _{IN}		0	3	dBm
Small Signal Gain Flatness	ΔG			±2.0	dB
Gain Adjustment Range	FGA		25		dB
Input Return Loss	S ₁₁			-10	dB
Noise Figure	NF		10		dB
Third Order Intercept Point 2-Tone @ 47dBm/Tone, 100kHz Spacing	IP3		+64		dBm
Harmonics @ P _{OUT} = 500W	H		-15		dBc
Spurious Signals	Spur		-70	-60	dBc
Operating Voltage (1-phase)	V _{AC}	180		260	Volt
Power Consumption @ P _{OUT} = 500W CW	P _D		2500	3000	Watt

MECHANICAL SPECIFICATIONS

Parameter	Value	Units
Dimensions	19 x 8.75 x 22	Inch
Weight	80	lb.
RF Connectors Input/Output	Type-N, Female	
Cooling	Built-in internal forced air cooling system	

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature	T _A	0		+50	°C
Non-operating Temperature	T _{STG}	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude (MIL-STD-810F Method 500.4)	ALT			30,000	Feet
Vibration/Shock MIL-STD-810F - Method 514.5/516.5 – Proc I	VI/SH		Airborne		

Solid State Broadband High Power Amplifier

2101 - BBS2E3KRR
20 – 500 MHz / 500 Watts
LIMITS


Input RF drive level without damage	+6 dBm	Max
Load VSWR @ P _{OUT} = 500W	@ 10:1 load phase & amplitude for duration of 1 minute 3:1 @ all load phase & amplitude continuous	-
Thermal Overload	85°C shutdown	Max

AVAILABLE OPTIONS

SKU #	Description	LCD Touchscreen
2101FLFBAXXXX	LCD controller, Front RF connectors 180-260VAC, 50/60Hz.	Touchscreen Digital Display, including FWD/REV Power indication (dBm or Watt scale), Gain Adjustment, ALC Fast/Slow, On/Off, Standby mode, Fault indication, Rear panel GPIB/HPIB IEEE-488.2 and Half Duplex RS232.
2101FLRBAXXXX	LCD controller, Rear RF connectors 180-260VAC, 50/60Hz.	
2101FFFBAXLXX	FGA (Front Gain Adjust) Front RF Connectors, 180-260VAC, 50/60Hz	
2101FFRBAXXXX	FGA (Front Gain Adjust) Rear RF Connectors, 180-260VAC, 50/60Hz	
Optional	Rack Slides (Call for price)	

I/O INTERFACE CONNECTOR – D-Sub 9-Pin, Female

Pin #	Description	Specifications	Options	
			FGA	LCD
1	Forward Test Point	Analog Voltage 0-5V _{DC} relative to Forward Power Level		√
2	Reverse Test Point	Analog Voltage 0-5V _{DC} relative to Reverse Power Level		√
3	5V Test Point	+5.0V _{DC} ±0.2V	√	√
4	VVA Test Point	+5.6V _{DC} ±0.2V	√	
5	EXT Shutdown	Amplifier Disable: TTL Logic High (5V) (Internally Pulled-Low)	√	√
6	12V Test Point	+12.0V _{DC} ± 0.5V	√	√
7	P/S Test Point	+26.0-30.0V _{DC}	√	√
8&9	GND	Ground	√	√

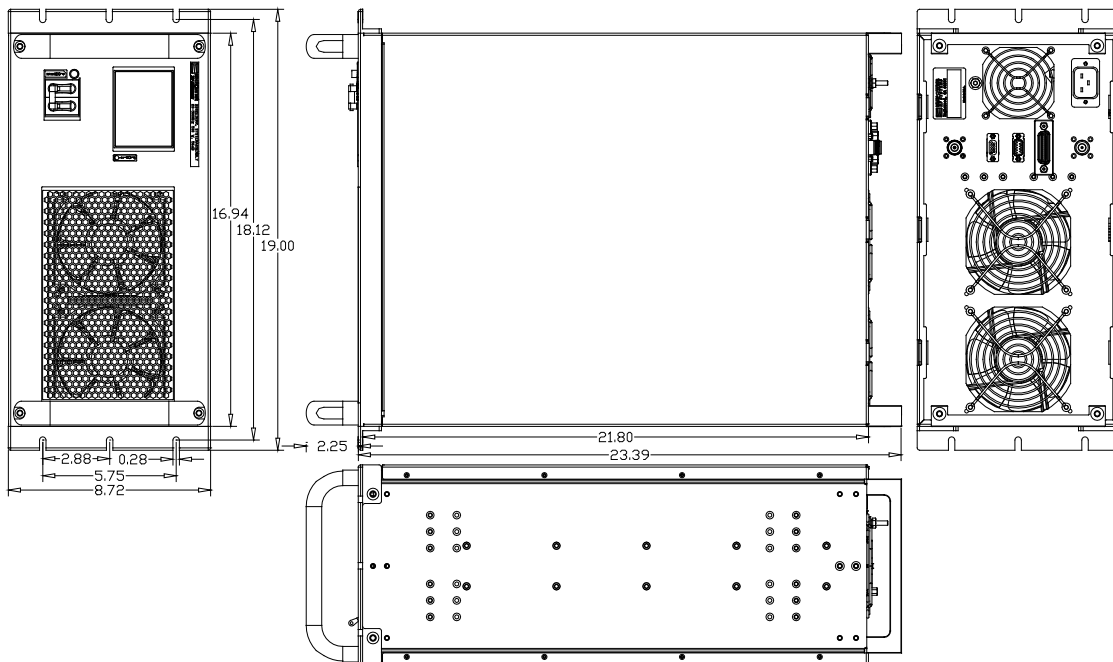OUTLINE DRAWING SHOWN
SKU #: 2101FLRBAXXXX


Solid State Broadband High Power Amplifier


2101 - BBS2E3KRR

20 – 500 MHz / 500 Watts

TYPICAL PERFORMANCE PLOTS


Plot 1 – Small Signal Gain and P_{1dB}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{1dB} , $P_{IN} = 0.0dBm$
 Reference: 57dB, 1dB/Div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/Div.

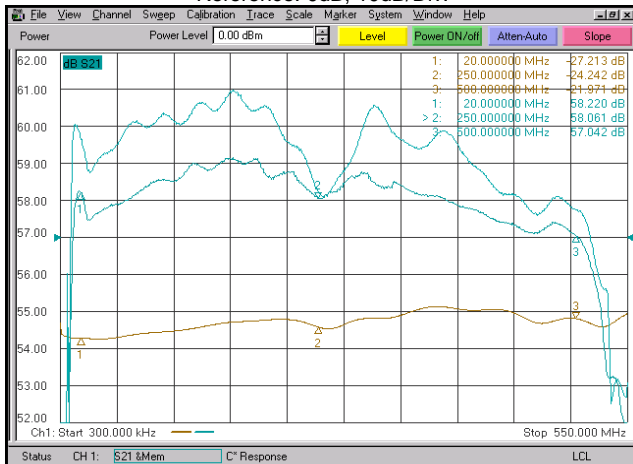


Plot 2 – Small Signal Gain and P_{SAT}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{SAT} , $P_{IN} = +2.0dBm$
 Reference: 57dB, 1dB/Div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/Div.

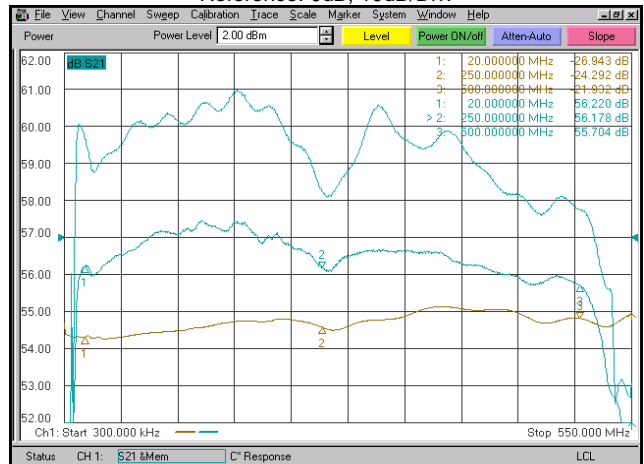

Plot 3 – Gain Adjustment Range

Top Curve: Maximum Gain @ $P_{IN} = -20dBm$
 Middle Curve: Minimum Gain @ $P_{IN} = -20dBm$
 Reference: 37dB, 10dB/Div.
 Bottom Curve: Input Return Loss @ Minimum Gain
 Reference: 0dB, 10dB/Div.

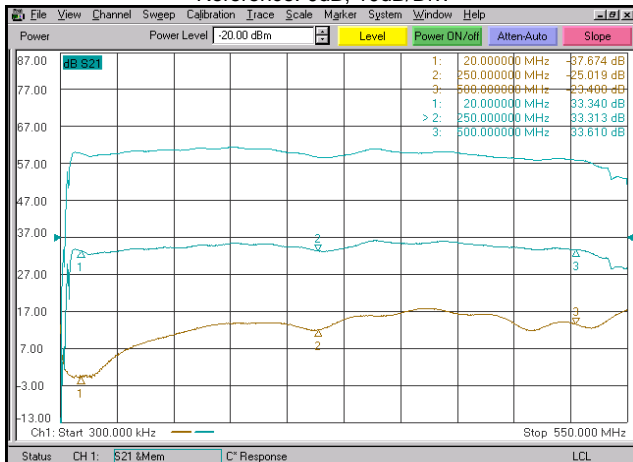

Plot 4 – ALC Flatness @ 54dBm & 47dBm

Top Curve: ALC @ 54dBm, $P_{IN} = 0dBm$
 Bottom Curve: ALC @ 47dBm, $P_{IN} = 0dBm$
 Reference: 51dB, 1dB/Div.
 Middle Curve: Input Return Loss
 Reference: 0dB, 10dB/Div.

