

Solid State Broadband High Power Amplifier

2026 - BBS3Q7EEL
800 – 4200 MHz / 25 Watts

The BBS3Q7EEL (2026) is suitable for ultra broadband high power linear applications, laboratory, and RFI/EMC susceptibility testing. This amplifier utilizes high power GaAsFET devices that provide wide frequency response and dynamic range, high gain, low distortions, and excellent linearity. Employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, and all qualified components achieve exceptional performance, and high efficiency. The system includes a universal voltage, single phase, power supply and a built in forced air-cooling system. Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.



SKU#: 2026CLFAAXXX

- Solid-state class A linear design
- Instantaneous ultra broadband
- Small and lightweight
- Front panel manual gain adjust or LCD controller
- Suitable for CW, AM, FM (Consult factory for other modulation types)
- 50 ohm input/output impedance
- High reliability and ruggedness

ELECTRICAL SPECIFICATIONS @ 120V_{AC}, 25°C, 50 Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	800		4200	MHz
Output Power CW	800-4000MHz	P _{SAT1}	25		Watt
	4000-4200MHz	P _{SAT2}	20		
Output Power @ 1dB Gain Compression	P _{1dB1}	20			Watt
	P _{1dB2}	15			
Power Gain @ 1dB Gain Compression	G _{1dB}	44			dB
Input Power for Rated P _{SAT}	P _{IN}		0	3	dBm
Small Signal Gain Flatness	ΔG			±2.0	dB
Gain Adjustment Range	FGA	20	25		dB
Input Return Loss	S ₁₁			-10	dB
Noise Figure	NF		10		dB
Third Order Intercept Point 2-Tone @ 33dBm/Tone, 100kHz Spacing	IP3		+55		dBm
Harmonics @ P _{OUT} = 20W	2 nd /3 rd			-25/-40	dBc
Spurious Signals	Spur			-70	dBc
Operating Voltage (1-phase)	V _{AC}	100		240	Volt
Power Consumption @ Rated P _{SAT}	P _D			300	Watt

MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Dimensions	19 x 3.5 x 18	Inch
Weight	30	Pound
RF Connectors Input/Output	Type-N, Female	
Cooling	Built-in internal forced air cooling system	

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature	T _A	0		+50	°C
Non-operating Temperature	T _{STG}	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude (MIL-STD-810F Method 500.4)	ALT			30,000	Feet
Vibration/Shock MIL-STD-810F - Method 514.5/516.5 – Proc 1	VI/SH		Airborne		

Solid State Broadband High Power Amplifier

2026 - BBS3Q7EEL

800 – 4200 MHz / 25 Watts

LIMITS

Input RF drive level without damage	+6 dBm	Max
Load VSWR @ P _{OUT} = 20W	∞ @ all load phase & amplitude for duration of 1 minute 3:1 @ all load phase & amplitude continuous	-
Thermal Overload	85°C shutdown	Max


AVAILABLE OPTIONS

SKU #	Description	LCD Touchscreen
2026CLFAAXXX	LCD controller, Front RF connectors 100-240VAC, 50/60Hz.	Touchscreen Digital Display, including FWD/REV Power indication (dBm or Watt scale), Gain Adjustment, ALC Fast/Slow, On/Off, Standby mode, Fault indication, Rear panel GPIB/HPIB IEEE-488.2 and Half Duplex RS232. <i>Note: (Output power is lowered by 0.5-0.75dB with this option)</i>
2026CLRAAXXX	LCD controller, Rear RF connectors 100-240VAC, 50/60Hz.	
2026CERAAXLXX	LCD controller, Rear RF connectors & Ethernet, 100-240VAC, 50/60Hz.	
2026CFFAAXXX	FGA (Front Gain Adjust), Front RF connectors, 100-240VAC, 50/60Hz	
2026CFRAAXXX	FGA (Front Gain Adjust), Rear RF connectors, 100-240VAC, 50/60Hz	
Optional	Rack Slides (Call for price)	

I/O INTERFACE CONNECTOR – D-Sub 9-Pin, Female

Pin #	Description	Specification	Option	
			FGA	LCD
1	Forward Test Point	Analog Voltage 0-5V _{DC} relative to Forward Power Level		√
2	Reverse Test Point	Analog Voltage 0-5V _{DC} relative to Reverse Power Level		√
3	5V Test Point	Output +5.0V _{DC} ±0.2V	√	√
4	VVA Test Point	VVA Gain Control +5.6V _{DC} ±0.2V	√	
5	EXT Shutdown	Disable: TTL Logic High (5V) (Internally Pulled-down)	√	√
6	12V Test Point	Output +12.0V _{DC} , ±0.5V	√	√
7	P/S Test Point	P/S Output voltage +13.0V _{DC} , -1.0/+2.0V	√	√
8&9	GND	Ground	√	√

SYSTEM OUTLINE SHOWN SKU#: 2026CLFAAXXX

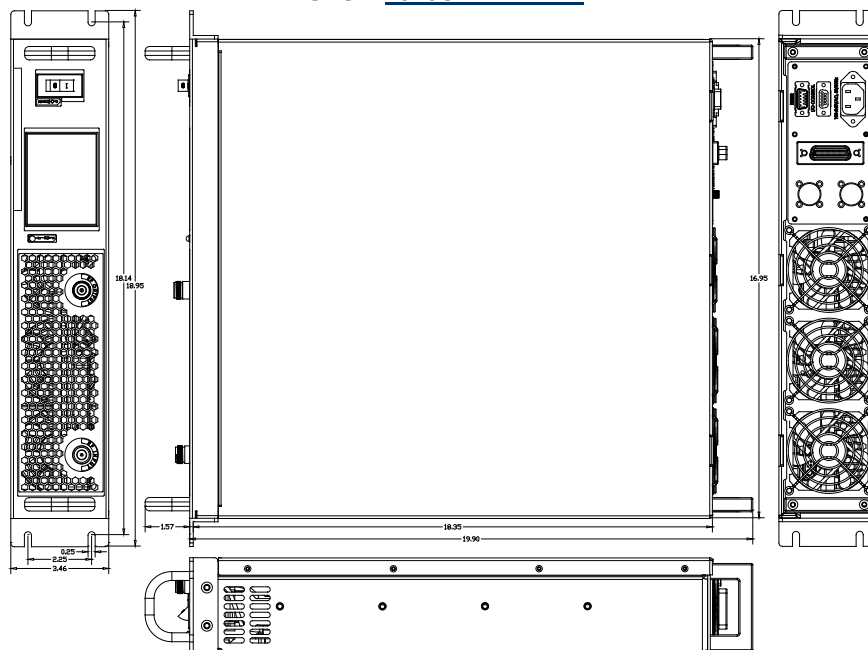

Solid State Broadband High Power Amplifier

2026 - BBS3Q7EEL

800 – 4200 MHz / 25 Watts

TYPICAL PERFORMANCE PLOTS

Plot 1 – Small Signal Gain and P_{1dB}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{1dB} , $P_{IN} = -3.5dBm$
 Reference: 46dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.




Plot 2 – Small Signal Gain and P_{SAT}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{SAT} , $P_{IN} = -1.0dBm$
 Reference: 46dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.



Plot 3 – Gain Adjustment Range

Top Curve: Maximum Gain @ $P_{IN} = -20dBm$
 Middle Curve: Minimum Gain @ $P_{IN} = -20dBm$
 Reference: 20dB, 10dB/div.
 Bottom Curve: Input Return Loss @ Minimum Gain
 Reference: 0dB, 10dB/div.

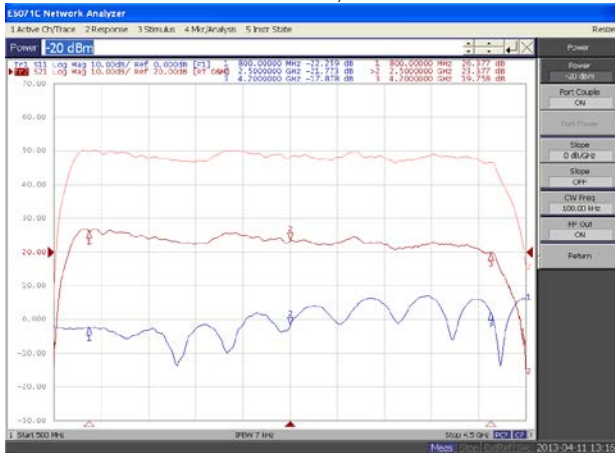

Plot 4 – ALC Flatness @ 5W & 15W

Top Curve: ALC @ 15W, $P_{IN} = 0dBm$
 Middle Curve: ALC @ 5W, $P_{IN} = 0dBm$
 Reference: 38dB, 2dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.

