

## Solid State Personal Communication Power Amplifier

**7086 – PCM3R3SCO**
**869 –894 MHz / 16 Watts 3GPP W-CDMA**

The PCM3R3SCO (SKU 7086) is designed for single and multi-channel 3GPP W-CDMA repeater applications in the UMTS frequency range. This amplifier utilizes linear LDMOS power devices that provide high gain, wide dynamic range, low distortions, and excellent group delay and phase linearity. Exceptional performance, long term reliability, and high efficiency are achieved by employing Direct Injection Pre-D™, advanced matching networks and combining techniques, EMI/RFI filters, machined housings, and qualified components. Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.



- Solid-state linearized design
- Small form factor and lightweight
- Suitable for single and multi FA W-CDMA
- 50 ohm input/output impedance
- High reliability and ruggedness
- Built-in control and monitoring circuits
- Built-in output isolator
- High efficiency

### ELECTRICAL SPECIFICATIONS @ +28V<sub>DC</sub>, 25°C, 50 Ω System, PAR 8 dB @ CCDF0.01%

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	869		894	MHz
Small Signal Gain	G <sub>SS</sub>	49	50	51	dB
Gain Flatness	ΔG		±0.75	±1.0	dB
Gain Flatness @ 42dBm				±0.75	dB
Gain variation over operating temperature range	ΔG <sub>TEMP</sub>			±1.5	dB
Input Power Range	P <sub>IN</sub>	-25		-2	dBm
Input/Output Return Loss	S <sub>11</sub> /S <sub>22</sub>			-14	dB
Power Output W-CDMA per 3 GPP standard	P <sub>WCDMA</sub>	16			Watt
ACLR @ P <sub>OUT</sub> = 42dBm 4-Tone W-CDMA, 64 DPCH, BW = 3.84MHz Spectrum Analyzer Settings: Res BW = 30KHz, Video BW = 100Hz	Δ = 5MHz			-45	dBc
	Δ = 10MHz			-50	
Harmonics @ 16W, 1FA W-CDMA	H			-45	dBc
Spurious Signals @ 16W	Spur			-70	dBc
Operating Voltage( < 560mV peak-to-peak)	V <sub>DD</sub>	27	28	29	Volt
Current Consumption P <sub>OUT</sub> = 16W, 4FAW-CDMA	I <sub>DD</sub>		3.0	3.3	Amp

### MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Dimensions – Metric (Inch)	110 x 170 x 28 mm (4.4" x 6.7" x 1.1")	Max
Weight	3.5	Max
RF Connectors Input / Output	Type-SMA, Female	
DC Interface Connectors	Control: D-Sub 9-Pin, Male DC Power: Hybrid, D-Sub 3-Pin, Male (3W3)	
Cooling	External Heatsink (Not Supplied)	

### LIMITS

Load VSWR @ P <sub>OUT</sub> = 16W	∞ @ all load phase & amplitude for duration of 1 minute 3:1 @ all load phase & amplitude continuous	-
Thermal Overload	95°C shutdown	Max

# Solid State Personal Communication Power Amplifier

**7086 – PCM3R3SCO**
**869 –894 MHz / 16 Watts 3GPP W-CDMA**
**ENVIRONMENTAL CHARACTERISTICS (Design to Meet)**

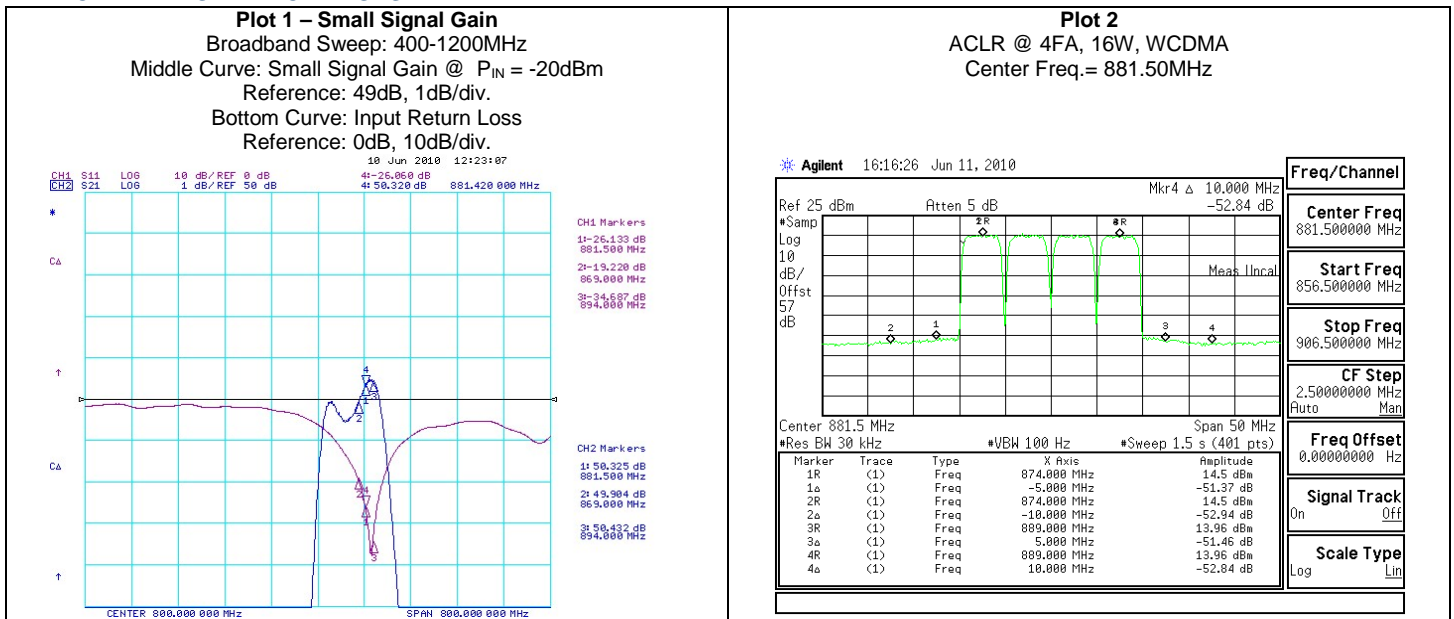
Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	T <sub>C</sub>	-30		+85	°C
Storage Temperature	T <sub>STG</sub>	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude (MIL-STD-810F Method 500.4)	ALT			30,000	Feet
Vibration/Shock MIL-STD-810F - Method 514.5/516.5 – Proc I	VI/SH		Airborne		

**CONTROL INTERFACE CONNECTOR – D-Sub 9-Pin, Male**

Pin #	Description	Specifications
1	GND	Ground
2	Over Power Alarm	TTL Logic High (5V) @ 44 dBm±0.5 dB
3	VSWR Alarm	TTL Logic High (5V) @ ≥3:1 VSWR
4	Temperature Monitor	Analog voltage relative to module temperature @ 10mV/°C x Temp) + 500mV
5	Over Temp Alarm	Fault: TTL Logic High (5V) @ 95°C (shutdown) Auto-restart @ 85°C (Normally Low)
6	Shutdown	Amplifier Enable: TTL Logic Low (0V) (Internally Pulled-High)
7	GND	Ground
8	Forward Power Monitor	Analog Voltage relative to forward power level +4.0V <sub>DC</sub> @ 42dBm, 0.1V/dB, 4FA W-CDMA
9	N/C	No Connection

**DC POWER INTERFACE CONNECTOR – Hybrid, D-Sub 3-Pin, Male**

Pin #	Description	Specifications
A1	VDD	+28.0V <sub>DC</sub> ±1.0 V
A2	GND	Ground
A3	N/C	No Connection

**TYPICAL PERFORMANCE PLOTS**


# Solid State Personal Communication Power Amplifier

7086 – PCM3R3SCO

869 –894 MHz / 16 Watts 3GPP W-CDMA

## OUTLINE DRAWING

