

# Solid State High Power Amplifier

**2232**
**5200 – 5900 MHz / 2.5 kW Peak**

The 2232 is a single drawer unit that produces a minimum output of 2.5 kW peak pulsed power and 200W CW power. The amplifier features multiple high power GaN on SiC devices that provide wide frequency response, high gain, high peak power capability, and low distortions. Exceptional performance, long-term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, and all qualified components. The amplifier includes integral forced air-cooling fans. Available operating voltage configurations are single phase, three phase AC up to 400 hertz.



The amplifier includes a built-in control and monitoring system, with protection functions which preserve maximum output capability and reliability. Remote management and diagnostics are via an embedded web server allowing network managed site status and control simply by connecting the unit's Ethernet port to a LAN. Using a web browser and the unit's IP address (IPv4) allows ease of access with the benefit of multilevel security. The control system core supports hardware encryption, runs an embedded OS (Linux), has a built-in non-volatile memory for event recording, and factory setup recovery features. The extended memory option allows storage of control parameters and event logs.

We are delivering more than just RF power, the next generation family of systems provide dynamic adjustments linked to the processing power and digital controls, which focus on maximizing system availability time as well as power output under ALL conditions.

Empower RF's ISO9001:2015 Quality Assurance Program assures consistent performance and the highest reliability.

- Solid-state class AB compact modular design
- Suitable for instantaneous pulse operation over the operating band.
- Embedded directional coupler – Eliminates the need for external components
- 50 ohm input/output impedance
- Built-in Control, Monitoring and Protection functions
- High reliability and ruggedness

## ELECTRICAL SPECIFICATIONS over temperature conditions (0 to +50°C)

Parameter	Symbol	Min	Typical	Max	Unit
Operating Frequency	BW	5200		5900	MHz
Power Output – Peak Pulse	P <sub>SAT_PK</sub>	2500			Watt
Power Output – CW	P <sub>SAT_CW</sub>	150	200		Watt
Pulse Width @ Duty Cycle 20% <sup>Notes 1</sup>	P <sub>WIDTH</sub>	1		500	µSec
Duty Cycle		0.5		20	%
Pulse Repetition Rate Frequency	PRF	0.5		25	kHz
Power Gain @ Rated Peak P <sub>OUT</sub> - Pulse	G <sub>PK</sub>	65			dB
Pulse Droop @ 500µSec Pulse Width	P <sub>DROOP</sub>		1.2	1.5	dB
Modulated Pulse Rise/Fall Time (10% to 90%)	T <sub>RISE</sub> /T <sub>FALL</sub>		70/70	150/150	nSec
Input power for rated Output – Pulse & CW signal	P <sub>IN</sub>		-5	0	dBm
Input Return Loss	S <sub>11</sub>			-10	dB
NPO – Noise Power Output	Enabled			-10	dBm/MH
	Disabled			-106	z
Harmonics @ P <sub>OUT_PULSE</sub> = 2.5kW <sub>PK</sub>	2 <sup>ND</sup> -5 <sup>TH</sup>		-40		dBc
Spurious Signals	Spur			-60	dBc
Operating Voltage	3-phase, delta (Line-to-Line)	V <sub>AC</sub>	180	208	Volt
	1-Phase			260	
Power Consumption @ 20% <sub>DC</sub> , P <sub>OUT</sub> = 2.5W <sub>PK</sub>	P <sub>D</sub>		1800	2500	VA

Note: 1. Call factory for application >20% duty cycle.

## PROTECTIONS

Parameter	Specification	Unit
Input Overdrive	≥10 dBm – Shutdown	-
Load VSWR Protection	The unit disables the RF when reverse power exceeds the safe level @ all load phase & amplitude	-
Thermal Shutdown	Baseplate ≥90 °C	-
Default Data Recovery	Factory Default Calibration Recovery	-

# Solid State High Power Amplifier

**2232**
**5200 – 5900 MHz / 2.5 kW Peak**

## MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Overall Dimension (W x H x D) (excludes handles, connectors and brackets)	17.5 x 8.75 x 22.0	Inch
Total Weight	95	Pound
RF Connectors Input/Output	Input: N-type, Female Output: 7/16-DIN, Female	RF IN RF OUT
RF Sample Connectors	SMA, Female	Forward / Reverse
Blanking/Gating Input Connector	BNC, Female	Blanking
Cooling	Built-in forced air-cooling system – front to rear	Airflow direction

## ENVIRONMENTAL CHARACTERISTICS:

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature *	T <sub>A</sub>	-10 *		+50	°C
Non-operating Temperature *	T <sub>STG</sub>	-20 *		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Shock / Vibration - MIL-STD-810F Shock Method 516.5, Vibration Method 514.5	SH / VI				

**Note:** [ \* ] Consult Empower RF for application conditions below -10°C / -20°C temperatures (Operational / Non-operational).

## COMMUNICATION INTERFACES:

Function	Utility	Connector
Ethernet	Network management of device / web interface	RJ45
USB	Mass Storage / Expansion Bus	USB 1.x/2.0 compatible
RS232, default [RS422, factory configurable]	Serial management device / local operator access	D-sub, 9-position Male


## SYSTEM I/O CONNECTOR – 14-Position

Pin #	Description	Specification
1	FWD Test Point	Forward detected power (analog voltage: 0-5 Volt)
2	REV Test Point	Reverse detected power (analog voltage: 0-5 Volt)
3	Summary Fault	Summary Fault: Active TTL Logic Low ( $\leq 0.7V$ ), ( <i>Internally Pulled-High</i> )
4	Reserved	No Connection
5	Shutdown	Amplifier Disable: TTL Logic Low ( $\leq 0.7V$ ), ( <i>Internally Pulled-High</i> )
6	Aux P/S Test Point	+12.0V <sub>DC</sub> $\pm 2.0V$ (resettable 0.5amp fuse)
7	Main P/S Test Point	+44.0V <sub>DC</sub> $\pm 4.8V$ (resettable 0.5amp fuse)
8	GND	Ground
9-11	Open drain control	Site management utility (reserved)
12&13	Digital I/O (configurable)	Site management utility (reserved)
14	GND	Ground

## Available Options

<b>2232-00X</b>
<b>-001</b> 180-260 VAC, 3-phase-Delta, 47-63 Hz, Rear RF Connectors
<b>-002</b> 180-260 VAC, 1-phase, 47-63 Hz, Rear RF Connectors
Contact us for other available options
<b>Standard Feature:</b>
-LCD Control, Ethernet & Serial Comm
-RF Sample Ports: Forward & Reverse [SMA Female]
-Blanking/Gating Port: BNC Female
-Rack Slides, Handles and Rackmount Brackets

## NOTIONAL BLOCK DIAGRAM

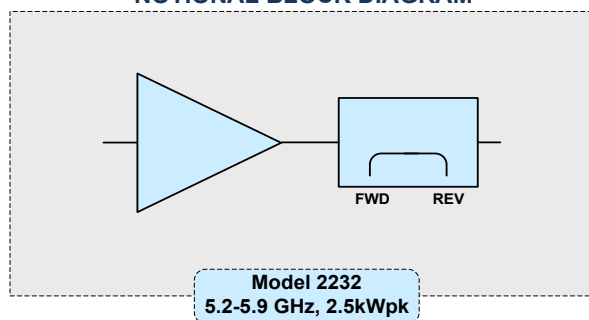

# Solid State High Power Amplifier

**2232**

**5200 – 5900 MHz / 2.5 kW Peak**

**MECHANICAL OUTLINE [with rear RF connectors]**

