

# Solid State Broadband High Power Amplifier

**2192**
**20 – 1000 MHz / 250 Watts**

The 2192 is suitable for multi-octave bandwidth high power CW, modulated, and pulse applications. This amplifier utilizes high power LDMOS devices that provide wide frequency response, high gain, high peak power capability, and low distortions. Exceptional performance, long-term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, and all qualified components. The amplifier is constructed within one single 3RU drawer including the forced air-cooling. Available operating voltage configurations are single-phase 100-240 VAC up to 400 Hz and 28 VDC.



SKU#: 2192-001

The amplifier includes a built in control and monitoring system, with protection functions which preserve high availability. Remote management and diagnostics are via an embedded web server allowing network managed site status and control simply by connecting the unit's Ethernet port to a LAN. Using a web browser and the unit's IP address (IPv4) allows ease of access with the benefit of multi-level security. The control system core runs an embedded OS (Linux), has a built-in non-volatile memory for event recording, and factory setup recovery features. The extended memory option allows storage of control parameters and event logs.

Empower RF's ISO9001:2015 Quality Assurance Program assures consistent performance and the highest reliability.

- Solid-state class AB, compact modular design
- Suitable for CW, AM, FM and pulse (Consult factory for other modulation types)
- Embedded directional coupler – Eliminates the need for external component
- 50 ohm input/output impedance
- Built-in Control, Monitoring and Protection functions
- High reliability and ruggedness

## ELECTRICAL SPECIFICATIONS over temperature conditions (-10 to +40°C)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency <i>(Note 3)</i>	BW	20		1000	MHz
Power Output CW <i>(Notes 1, 4)</i>	P <sub>SAT</sub>	250			Watt
Power Output @ 1dB Gain Compression <i>(Note 2)</i>	P <sub>1dB</sub>	200			Watt
Power Gain @ 1dB Gain Compression	G <sub>1dB</sub>	54			dB
Input Power Range	P <sub>IN</sub>		0		dBm
Input Power Range (Mode ALC)	P <sub>IN</sub>	-3.0		+3.0	
Small Signal Gain Flatness / Leveled (ALC)	ΔG			±3.5/±1.0	dB
Gain Adjustment Range	VVA	20			dB
Input Return Loss	S <sub>11</sub>			-10	dB
Noise Figure @ maximum gain 20-300MHz/300-1000MHz	NF			20/15	dB
Third Order Intermodulation Distortion 2-Tone @ 48dBm/Tone, 1MHz Spacing	IM3		-20		dBc
Harmonics @ P <sub>OUT</sub> = 200W	2 <sup>ND</sup>			-20	dBc
	3 <sup>RD</sup>			-15	
Spurious Signals	Spur			-60	dBc
Operating Voltage	V <sub>AC</sub>	100	120	240	Volt
	V <sub>DC</sub>	24	28	32	
Power Consumption @ 250W CW	P <sub>D</sub>		1100	1900	Watt

- Notes:
1. CW measurement performed in MGC Mode (Manual Gain Control).
  2. P<sub>1dB</sub> measurement performed with AM 80% depth of Modulation, 1 kHz modulation signal.
  3. Full instantaneous operation down 20MHz – consult factory for details.
  4. The front RF connectors option output power is less by up to 0.50 dB due to added insertion loss of the RF cable routed to the front panel.

## MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Dimensions W x H x D (excludes connectors, handles and brackets)	17 x 5.25 x 22	Inch
Weight	75	Pound
RF Connectors Input/Output	N-type, Female	RF INPUT/RF OUTPUT
RF Sample Connectors	SMA, Female	FWD / REV
Blanking / Gating Input Connector	BNC, Female	BLANKING
Cooling	Built-in forced air cooling system – front to rear	Airflow Direction

# Solid State Broadband High Power Amplifier

**2192**
**20 – 1000 MHz / 250 Watts**
**ENVIRONMENTAL CHARACTERISTICS (Design to meet)**

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature	T <sub>A</sub>	-10		+50	°C
Non-operating Temperature	T <sub>STG</sub>	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Shock / Vibration - MIL-STD-810F Shock Method 516.5, Vibration Method 514.5	SH / VI				

**PROTECTIONS**

Parameter	Specification	Unit
Input Overdrive	+10 dBm	Max
VSWR Protection	At ~3:1 Load – PA backs-off output power to a safe operating level – no system shutdown, “On Air” time is maximized	-
Thermal Shutdown	Above 50°C ambient	-
Default Data Recovery	Factory Default Calibration Recovery	-

**COMMUNICATION INTERFACES**


Function	Utility	Connector
Ethernet	Network Management of Device / Web Interface	RJ45
USB	Mass Storage / Expansion Bus	USB 1.x/2.0 compatible
RS232, default (RS422, factory configurable)	Serial management of device / local operator access	D-Sub 9-position Male

**SYSTEM I/O INTERFACE CONNECTOR – 14-Position**

Pin #	Description	Specification
1	N/C	No Connection (reserved)
2	N/C	No Connection (reserved)
3	Summary Fault	Summary Fault: Active TTL Logic Low ( $\leq 0.7V$ ) = Fault, ( <i>Internally Pulled-High</i> )
4	Reserved	No Connection
5	Shutdown	Amplifier Disable: TTL Logic Low ( $\leq 0.7V$ ), ( <i>Internally Pulled-High</i> )
6	Aux P/S Test Point	+12.0V <sub>DC</sub> $\pm$ 2.0V (resettable 0.5amp fuse)
7	Main P/S Test Point	+44.0V <sub>DC</sub> $\pm$ 4.8V (resettable 0.5amp fuse)
8	GND	Ground
9-11	Open drain control	Site management utility (reserved)
12&13	Digital I/O (configurable)	Site management utility (reserved)
14	GND	Ground

**AVAILABLE OPTIONS**

<b>2192-xxx</b>
<b>-001</b> 100-240VAC, 1-PH, 47-63 Hz, Rear RF Connectors
<b>-002</b> 28VDC, Rear RF Connectors
<b>-003</b> 100-240VAC, 1-PH, 47-63 Hz, Front RF Connectors <i>NOTE 4</i>
<b>-004</b> 28VDC, Front RF Connectors <i>NOTE 4</i>
Contact us for other available options
<b>Standard Feature:</b>
-LCD Control, Ethernet & Serial Comm
-Main RF Connectors: <b>Input &amp; Output</b> [N-type, F]
-RF Sample Ports: Forward & Reverse [SMA-F]
-Blanking/Gating Port: BNC-F
-Rack Slides, Handles and Rackmount Bracket

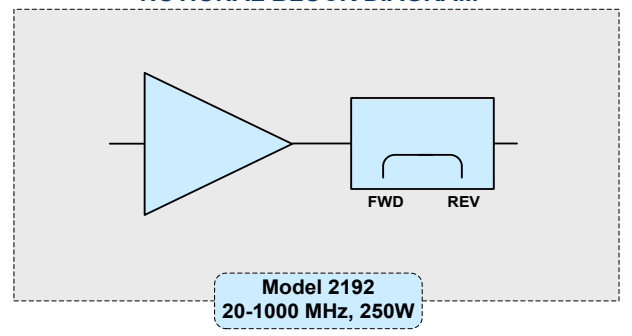
**NOTIONAL BLOCK DIAGRAM**


# Solid State Broadband High Power Amplifier

**2192**

**20 – 1000 MHz / 250 Watts**

**OUTLINE DRAWING – (shown with rear RF connectors)**

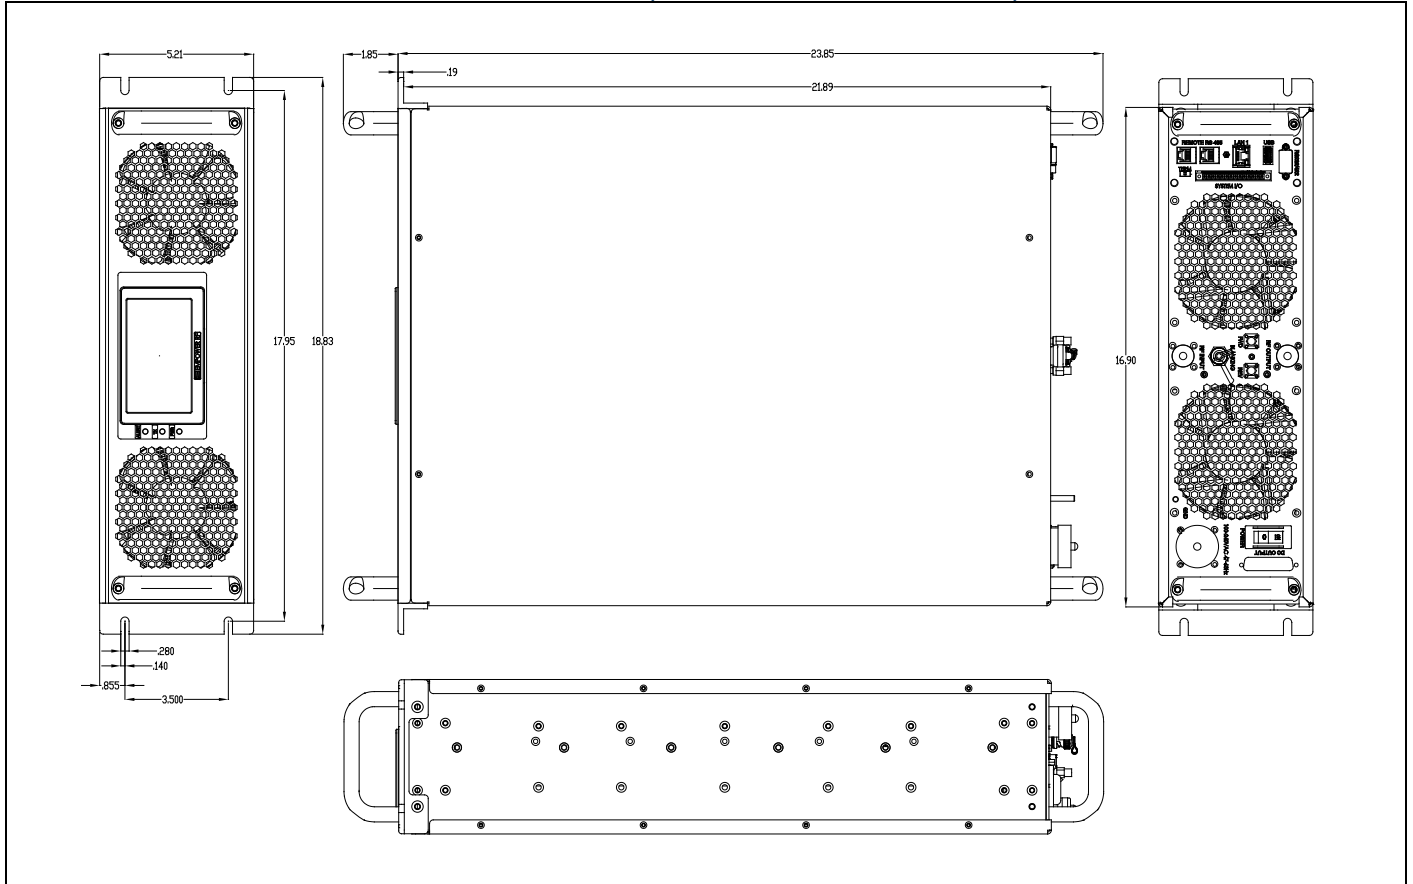

**Front and Rear Views**

