

## Solid State Broadband High Power Amplifier

**2222**
**600 - 6000 MHz / 50 Watts**

The 2222 is suitable for high bandwidth, high power CW, modulated, and pulse applications. This amplifier utilizes high power GaN devices that provide wide frequency response, high gain, high peak power capability, and low distortions. Exceptional performance, long-term reliability and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, EMI/RFI filters, and all qualified components. The amplifier is constructed with a 3RU drawer, including the forced air-cooling. Available operating voltage configurations are single phase 100-240 VAC up to 400Hz and 28 VDC.



The amplifier includes a built-in control and monitoring system, with protection functions which preserve high availability. Remote management and diagnostics are via an embedded web server allowing network managed site status and control simply by connecting the unit's Ethernet port to a LAN. Using a web browser and the unit's IP address (IPV4) allows ease of access with the benefit of multi-level security. The control system core supports hardware encryption, runs an embedded OS (Linux), has a built-in non-volatile memory for event recording, and factory setup recovery features. The extended memory option allows storage of control parameters and event logs.

Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.

- Solid-state Class AB design
- Suitable for CW, AM, FM, pulse, and some linear applications (Consult factory for other modulation types)
- Compact Modular design
- 50 ohm input/output impedance
- Built-in Control, Monitoring and Protection functions
- High reliability and ruggedness

**PRELIMINARY**

### ELECTRICAL SPECIFICATIONS over temperature conditions (-10 to +50°C)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	600		6000	MHz
Power Output CW <i>(Note 1)</i>	P <sub>SAT</sub>	50			Watt
Power Gain @ 1dB Gain Compression	G <sub>1dB</sub>	50			dB
Input Power for Rated P <sub>SAT</sub>	P <sub>IN</sub>		0		dBm
Input Power Range	P <sub>IN</sub>	-3.0		+3.0	dBm
Small Signal Gain Flatness / Leveled ALC	ΔG			±3.5/±1.5	dB
Gain Adjustment Range	VVA	20			dB
Input Return Loss	S <sub>11</sub>			-10	dB
Noise Figure @ maximum gain	NF			20	dB
Third Order Intermodulation Distortion 2-Tone @ 40dBm/Tone, 1MHz Spacing	IM3		-25		dBc
Harmonics @ P <sub>OUT</sub> = 50W	2 <sup>ND</sup>			-15	dBc
	3 <sup>RD</sup>			-20	dBc
Spurious Signals	Spur			-60	dBc
Operating Voltage	V <sub>AC</sub>	100		240	Volt
	V <sub>DC</sub>	24	28	32	
Power Consumption @ 50W CW	P <sub>D</sub>			800	Watt

Notes: 1. CW measurement performed in MGC Mode (Manual Gain Control)

### MECHANICAL SPECIFICATIONS

Parameter	Value	Unit
Dimensions W x H x D (excludes connectors, handles and brackets)	17 x 5.25 x 22	Inch
Weight	65	Pound
RF Connectors Input/Output	Type-N, Female	
RF Sample	Type-SMA, Female	
Blanking Input	Type-BNC, Female	
Cooling	Built in forced-air cooling system	

# Solid State Broadband High Power Amplifier

**2222**
**600 - 6000 MHz / 50 Watts**
**ENVIRONMENTAL CHARACTERISTICS (Qualification Data available for review):**

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature	T <sub>A</sub>	-10		+50	°C
Non-operating Temperature	T <sub>STG</sub>	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Shock / Vibration - MIL-STD-810F Shock Method 516.5, Vibration Method 514.5	SH / VI				

**PROTECTIONS:**

Parameter	Specification	Unit
Input Overdrive	+10 dBm	Max
VSWR protection	At 3:1 – PA backs-off output power to a safe operating level – no system shutdown, “On Air” time is maximized	-
Thermal – Graceful Degradation	Ambient 50°C	Min
Default Data Recovery	Factory Default Calibration Recovery	

**COMMUNICATION INTERFACES:**


Function	Utility	Connector
Ethernet	Network management of device / web interface	RJ45
USB	Mass storage / Expansion Bus	USB 1.x/2.0 compatible
RS-232 (default) RS-422 (optional)	Serial management of device / local operator access	D-Sub 9-position Male

**SYSTEM I/O CONNECTOR – 14-Position**

Pin #	Description	Specification
1	N/C	No Connection (reserved)
2	N/c	No Connection (reserved)
3	Summary Fault	Summary Fault: Active TTL Logic Low ( $\leq 0.7V$ ), ( <i>Internally Pulled-High</i> )
4	N/C	No Connection (reserved)
5	Shutdown	Amplifier Disable: TTL Logic Low ( $\leq 0.7V$ ), ( <i>Internally Pulled-High</i> )
6	Aux P/S TP	+12.0V <sub>DC</sub> $\pm 2.0V$ (resettable 0.5amp fuse)
7	Main P/S TP	+48.0V <sub>DC</sub> $\pm 4.8V$ (resettable 0.5amp fuse)
8	GND	Ground
9-11	Open drain control	Site management utility (reserved)
12&13	Digital I/O (configurable)	Site management utility (reserved)
14	GND	Ground

**Available Options**

<b>2222-XXX</b>
<b>-001</b> 100-240VAC, 1-phase, 47-63 Hz, Rear RF Connectors
<b>-002</b> 28 VDC, Rear RF Connectors
<b>-003</b> 100-240VAC, 1-phase, 47-63 Hz, Front RF Connectors
<b>-004</b> 28 VDC, Front Connectors
<b>-005</b> TBD
Contact us for other available options: <a href="mailto:sales@empowerrf.com">sales@empowerrf.com</a>
<b>Standard Features:</b>
-LCD Control, Ethernet & Serial Comm
-Main RF Connector: <b>Input &amp; Output</b> [Type-N, F]
-Sample Port: SMA-F [Forward & Reverse]
-Blanking/Gating Port: BNC-F
-Rack Slides, Handles and Rackmount Bracket

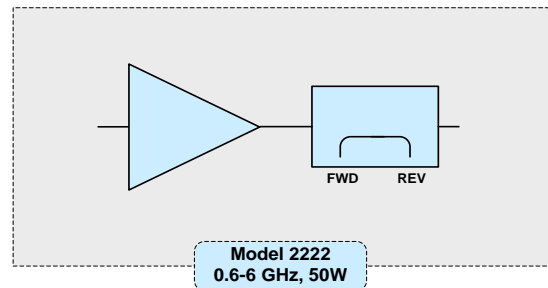
**NOTIONAL BLOCK DIAGRAM**


# Solid State Broadband High Power Amplifier

2222

600 - 6000 MHz / 50 Watts

**OUTLINE DRAWING – (shown with Rear RF Connectors)**

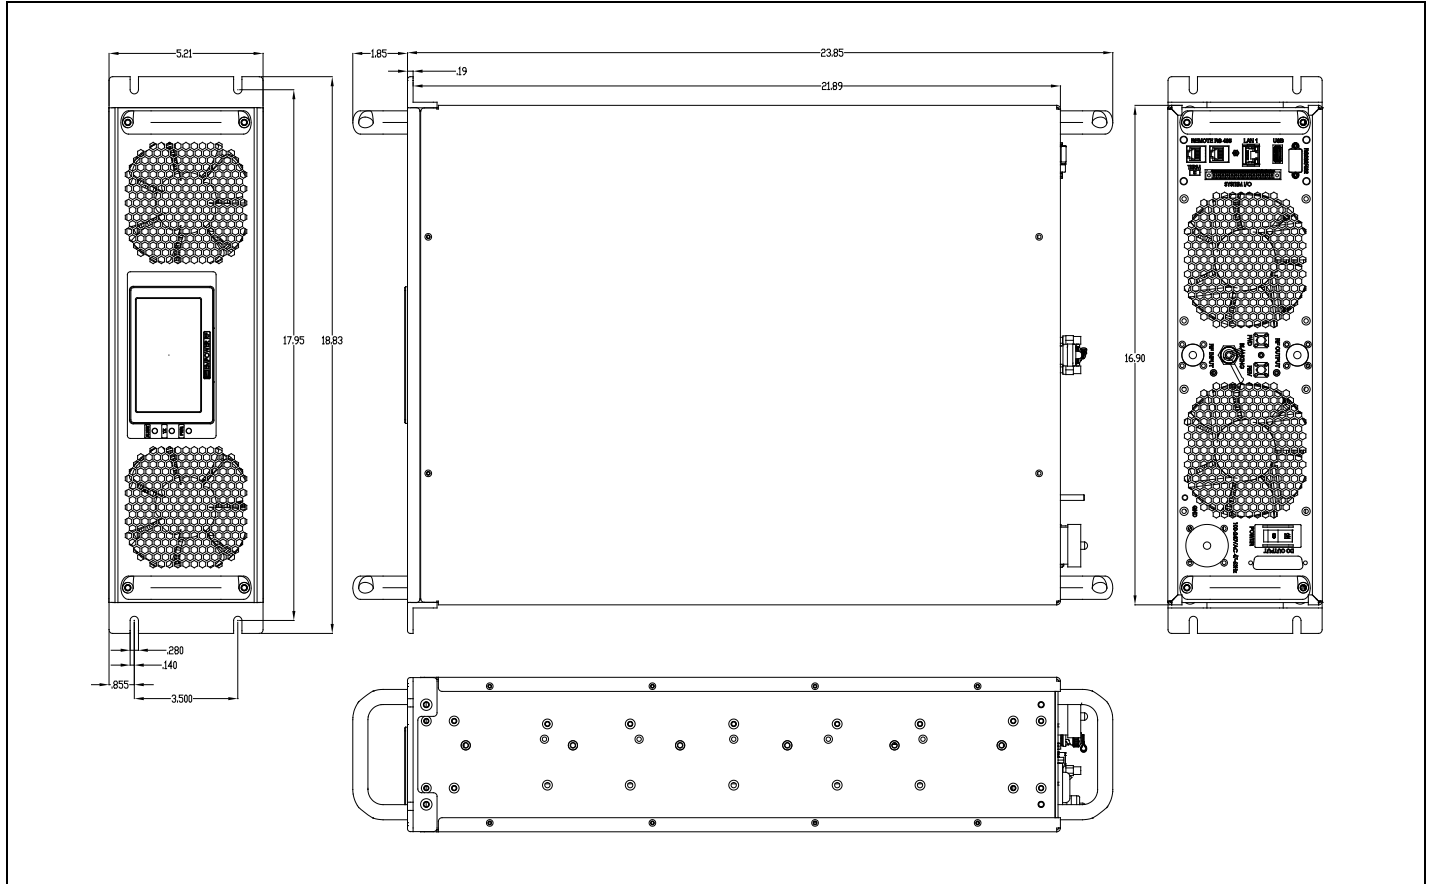

**Front and Rear Views**

